

alpro

ANSI Electric Strike

EL900



The Alpro EL900 is a compact electric strike complete with long or short faceplates for use in metal or timber applications.

An extension lip is also included within the kit.

Construction

Compact body design - 35mm depth

Holding Force - up to 660KgF
(manufacturer's test)

Function

Innovative function change over from fail secure (PTO)/fail safe (PTL)

Electrical Features

Low current consumption

Accessories

Long and short ANSI stainless steel

faceplates supplied as standard

25mm extension supplied as standard

Mounting Kit supplied as standard

Technical Information

Power consumption and current draw

12VDC - 300mA

24VDC - 150mA

The EL900 can be used in either fail safe (PTL) or fail secure (PTO) mode. Simply ensure that the screw is positioned in either hole as per the illustration and either function can be achieved.

Retain the screw for future use (PTO).

Wiring

Red

12V DC

Red

Monitoring

Blue

Green

Yellow

NC

C

NO

3 YEAR GUARANTEE



Ordering Information

Description

12VDC ANSI complete with SS Short/Long Faceplate and 25mm Extension Lip

Function

Code

Fail Safe / PTL

EL901

12VDC ANSI monitored complete with SS Short/Long Faceplate and 25mm Extension Lip

Fail Safe / PTL

EL901M

12VDC ANSI complete with SS Short/Long Faceplate and 25mm Extension Lip

Fail Secure / PTO

EL902

12VDC ANSI monitored complete with SS Short/Long Faceplate and 25mm Extension Lip

Fail Secure / PTO

EL902M

24VDC ANSI complete with SS Short/Long Faceplate and 25mm Extension Lip

Fail Safe / PTL

EL903

24VDC ANSI monitored complete with SS Short/Long Faceplate and 25mm Extension Lip

Fail Safe / PTL

EL903M

24VDC ANSI complete with SS Short/Long Faceplate and 25mm Extension Lip




Fail Secure / PTO

EL904

24VDC ANSI monitored complete with SS Short/Long Faceplate and 25mm Extension Lip

Fail Secure / PTO

EL904M

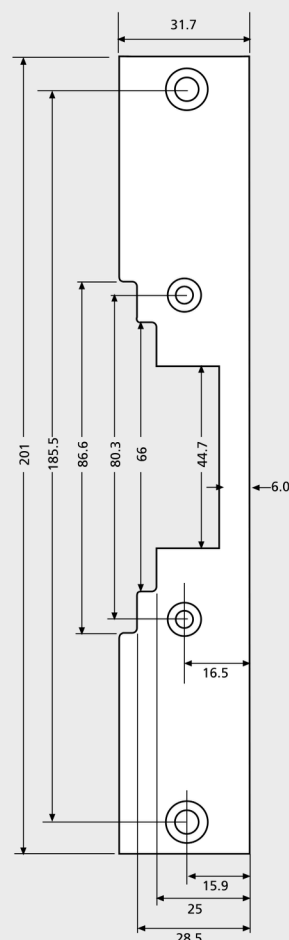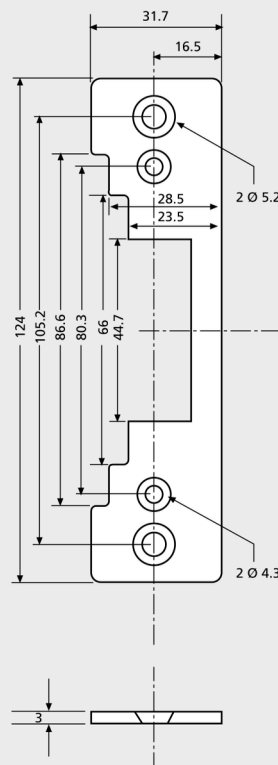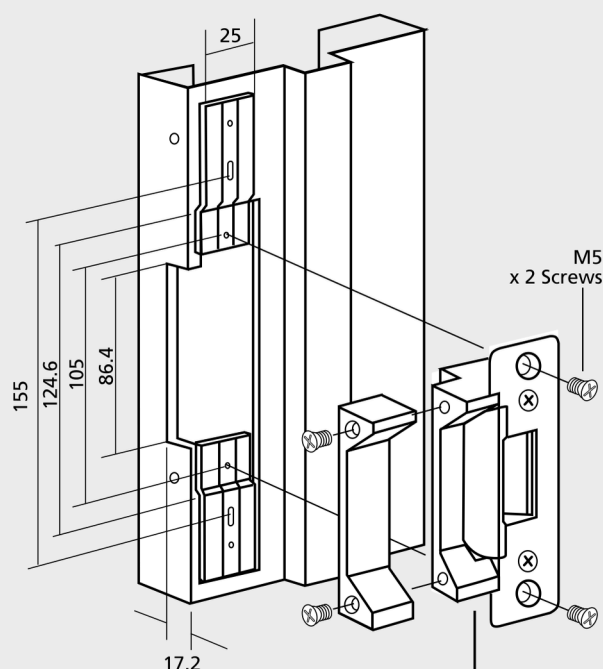


Fail Secure - (PTO)
Screw Fitted



Fail Safe - (PTL)
Screw Fitted in park
hole



Short/Long SS face plate
options and 25mm
Extension Lip included in
Strike Kit



All dimensions are shown in mm.