

alpro

Rectifier Sounder Module

RM1



Alpro's Electric Strikes
to operate with AC systems



The RM1 enables Alpro strikes to operate with AC systems.

Only for use with products with a maximum current load of 1 amp. These are not suitable to use with solenoid bolts or shearlocks for example.

RM1 Continuously Rated

Switchable Buzzer

Buzzer function available on DC - on/off.
Allows for silent operation on AC.

Power

Input voltage range is 12-24V AC $\pm 15\%$.
There is no polarity on the AC input.
Output will always be lower than the input by 10% approximately. If you require 12V DC output ensure input is at least 13V AC.
Standard voltmeters will show the output voltage as lower, this is because the output is not smoothed which will create false readings on your meter.

Current Load

Maximum current load is 1 amp (1000mA).

Sounder

The sounder will sound whenever an input voltage is present, if this is not required remove the link located next to the sounder. Store the link on the pin, in case you change your mind and need it later.

Location

This RM1 Rectifier is not designed to work in damp environments; **and MUST BE protected from moisture.** If this is not possible at the device end of the circuit, the PCB must be removed to a dry position near the AC power source. The exact location of the PCB is not critical; the voltage output will not change significantly.

DC Input

This product will accept a DC input if you only wanted to use the sounder function. There is still no polarity on the input and the output polarity will always be as shown.

Patented

Unique to Alpro

2 YEAR GUARANTEE

Ordering Information

Description


Rectifier Sounder Module

Function

for AC operation

Code

IEC-RM1

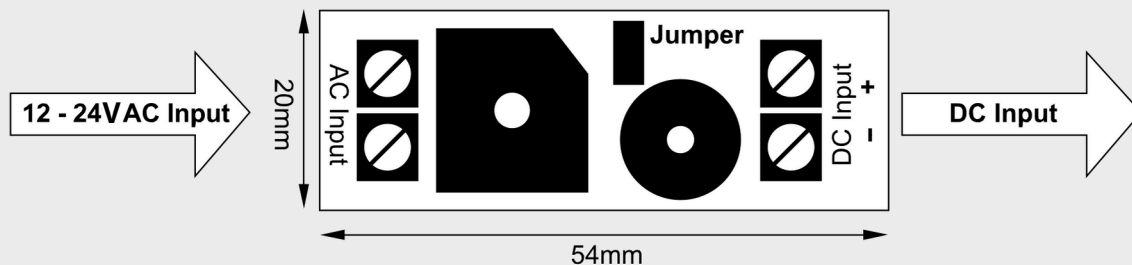

All dimensions are shown in mm.