


alpro

Power Supplies

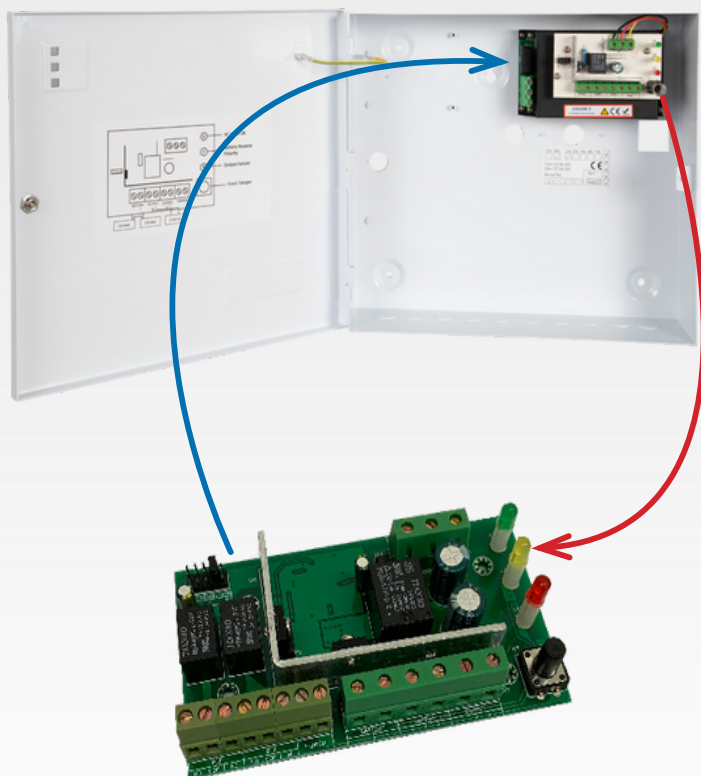

SPECIFICATION

- Full current to load
- 13.8 VDC $\pm 2.5\%$ / 27.6 VDC $\pm 2.5\%$ regulated output
- Additional battery charging
- Deep discharge protection
- Integrated current limiter
- Short circuit protection
- 230VAC input (fused)
- Mains transient protection
- Available in 1A, 2A, 3A and 5A
- Allows for 1 x 9Ah batteries

FEATURES

- Switch mode technology
- Constructed in a modular arrangement
- Allows for quick upgrade to Monitored PSU
- Mild steel construction in white powder coating
- LED Indicators (mains, batt, output)
- Separate fused main connectors
- Full electronic protection
- Onboard tamper protection
- Efficient power conversion
- Multiple cable entry

Ordering Information

IECPUSU12V1AMP	-	PSU Boxed 12V DC 1A
IECPUSU12V2AMP	-	PSU Boxed 12V DC 2A
IECPUSU12V3AMP	-	PSU Boxed 12V DC 3A
IECPUSU12V5AMP	-	PSU Boxed 12V DC 5A
IECPUSU24V2AMP	-	PSU Boxed 12V DC 2A

