

alpro

Monitored Electric Strike

AL2000



The Alpro AL2000 series high security monitored strikes are designed for timber and metal door applications.

12/24v Selectable High Security

Stainless steel one part body and striker

Holding Force

1,380kg (3,000lb)

Monitoring

Latch and door monitoring

Anti-tamper monitoring

Compact Shallow Body

26mm overall depth

Low Current Consumption

220mA - 12V DC continuous ($\pm 15\%$)

110mA - 24V DC continuous ($\pm 15\%$)

Simple Fail Safe / Fail Secure Changeover

Installation

Stick on / peel off template

Weather Resistant - IP56 Protection as Standard Options

Extension lips (to be purchased separately) available in- 15, 25, 50 and 75mm (pre-drilled strike body)

Approvals

EN 61000-6-3 : 2021

EN 61000-4-2 : 2009

EN 61000-4-8 : 2010

EN 61000-4-3 : 2020

EN 61000-4-6 : 2014

AC Compatibility (with RM1)

The Rectifier Sounder Module enables operation with AC voltages. The sounder can be set for either buzzing or silence with both AC and DC voltages. The IEC RM1 unit is continuously rated – max 1 amp.



Lock Compatibility

Accepts 15mm latch bolt when fitted with 3mm door gap

Ordering Information

Description

12/24V DC Monitored Strike including mounting kit
12/24V DC Monitored Strike including mounting kit
For Lipless version add '0' to code e.g. 'AL2001-0'

Accessories

15mm Extension Lip
25mm Extension Lip
50mm Extension Lip
75mm Extension Lip
Rectifier Sounder Module

Function

Fail Safe / PTL
Fail Secure / PTO



Code

AL2001
AL2002

ALEX2015
ALEX2025
ALEX2050
ALEX2075
IEC-RM1

Note: For detail of installation see instructions/template

Overall depth 26mm

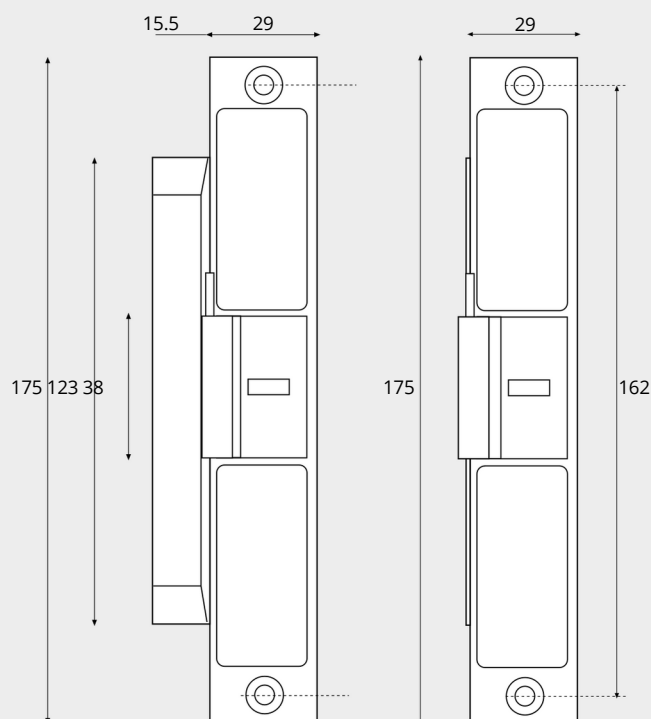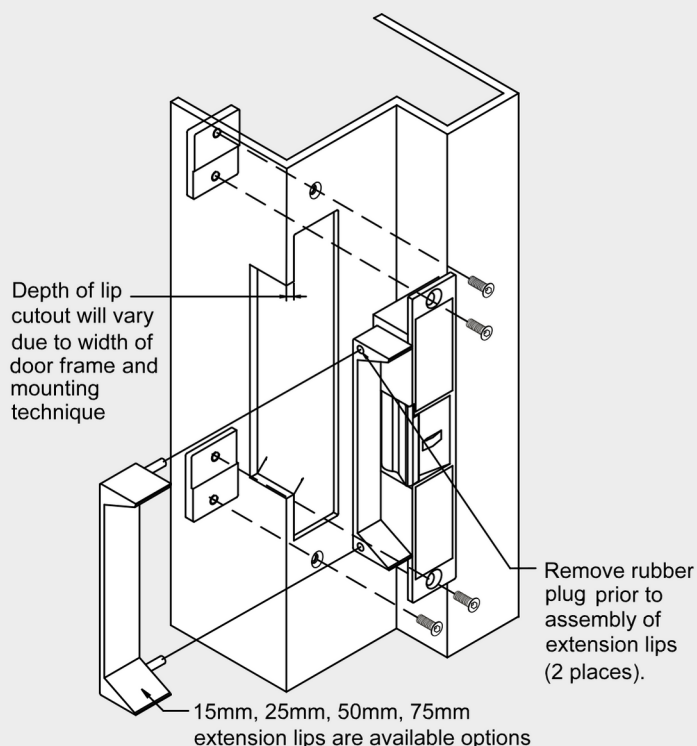

All dimensions are shown in mm.