

alpro

SlimlineKeyOverride DeadlockingBolt

DB25KO



The Alpro DB25KO key override model offers the same functionality as the standard DB25 with provision for a Europrofile cylinder as a means of mechanical override. The ultra-slim design of the DB25KO enables fixing into very narrow sections. An advanced microprocessor module provides power reduction allowing continuous operation without heat generation as well as automatic voltage regulation.

High Physical Security

Holding force 1,000kg - automatic deadlocking
Bolt throw 16mm

Robust Construction

All stainless steel bolt of 12.7mm diameter, linkages and springs. 3mm stainless steel faceplate and strike plates with fully enclosed mechanism.

Maintained Key Override

Using standard Euro profile cylinder case pierced both sides for operation either side.

Versatile Installation

Designed to provide concealed high security locking on any single or double action, hinged or sliding door in timber or metal for vertical or horizontal mounting.

Slimline Dimensions

280mm(L) x 25mm(W) x 42mm(D) 230mm(L) x 22mm(W) x 42mm(D) Back box

Multiple Voltage Input

Any voltage from 12V DC -10% to 24V DC +15%. Complete with built in transient and reverse polarity protection and continuously rated solenoid.

Low Current Consumption

Volts	Current - Activate	Current - Hold (after 200ms)
12VDC	1100mA	210mA
24VDC	1000mA	90mA

Triple Monitoring

Bolt, door and key position switches

Accessories

Stainless steel surface mount kit

Approvals

EN 61000-6-1 : 2007
EN 61000-6-3 : 2007

5 YEAR GUARANTEE



Built-in Access Control Module

Selectable unlock period – a field select or timer once the bolt is signalled to unlock. This enables traffic exiting 0, 3, 6 or 9 seconds in which to open the door before it automatically relocks. See Anti-Tailgate.


Multiple auto relock function – when relocking the bolt makes 9 locking attempts over 18 seconds. Change in the Bolt Position Switch status indicates that the door has been locked. Fail safe models only.

Multiple unlock – in fail secure mode 5 attempts to unlock door at 2 second intervals.

Anti-Tailgate – once the door has been pushed open and closed during the chosen unlock period, the bolt will immediately relock.

Ordering Information

Description	Function	Code
12/24V DC 12/24V DC	Fail Safe/ PTL Fail	DB25KO PTLOCK
Accessories	Secure / PTO	DB25KO PTOOPEN
Surface Mounting Kit - Surface Mount Housing/Surface Mount Strike Box/		
Long Strike Plate (stainless steel)		DB25KO/SMH-KIT
Extras for glass applications - Kit comprises 2 stainless steel Dress Plates		DB25KO/SMK-DP
Long Strike Plate - Replacement		DB25KO/LONG
Half Euro Profile Cylinder Keyed Alike 40mm		5224
Half Euro Profile Cylinder Keyed Differ 40mm		5222

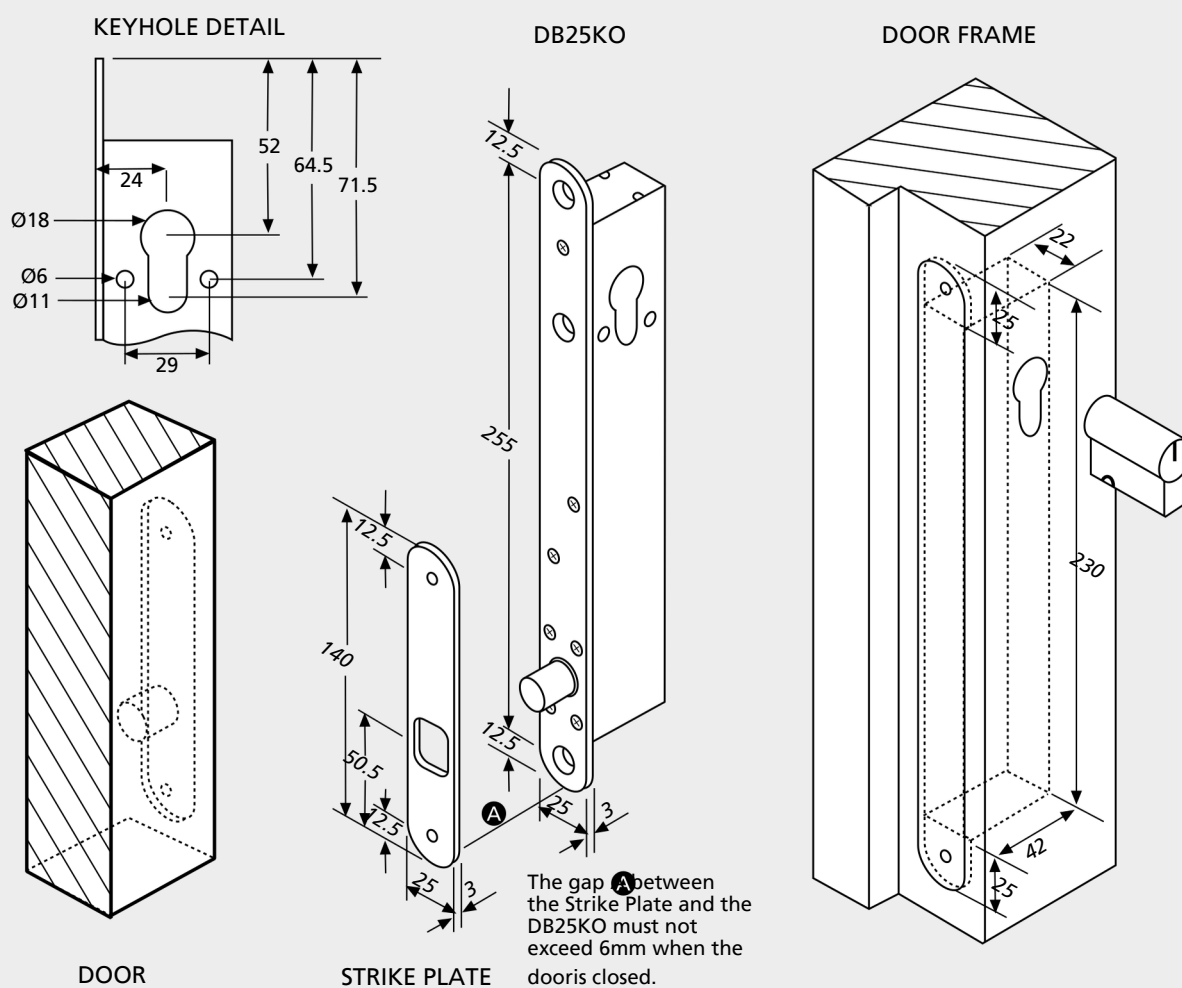

DOOR

STRIKE PLATE

Housing dimensions: 295mm (L) x 47mm (H) x 28.5mm (W)

All dimensions are shown in mm.