

Features

- Range of back sets available
- Locks accept standard 37/32" 29.37mm mortice key or thumbturn cylinder
- Faceplate finish SAA
- Industry standard ANSI cut outs
- Europrofile or round mortise cylinder options
- Latch hold back facility
- Latches compatible for use with electric strikes

Functionality

Deadlatches offer flexible control of situations and can be used in conjunction with electric strikes to provide the added option of remote access control. Designed to operate on doors with 3mm door gaps, the deadlatches can also be operated with the 459 paddle handle (cam plug required).




R = Reversible Handing

Code	Description	For use with	Finish
5245101	Deadlatch to suit round mortice cylinder 9/8" back set (RH)		N/A
5245102	Deadlatch to suit round mortice cylinder 9/8" back set (LH)		N/A
5245103	Deadlatch to suit round mortice cylinder 31/32" back set (RH)		N/A
5245104	Deadlatch to suit round mortice cylinder 31/32" back set (LH)		N/A
5245105	Alpro Deadlatch to suit round mortise cylinder complete with strike plate 3/2" back set R		N/A
52FP4511	Flat faceplate - width 25mm	4570/4510	SAA
52FP4512	Radius faceplate - width 25mm	4570/4510	SAA
52FP4513	Radius faceplate with weather strip -width 25mm	4570/4510	SAA
5235	Strike plate		N/A
5245-FIX-KIT	Deadlatch fixing kit - width 25mm	4570/4510	N/A
5245ESP	Extended strike plate	4570/4510	N/A

For details of the faceplate variants available, see page 14.

524510 Lock Type

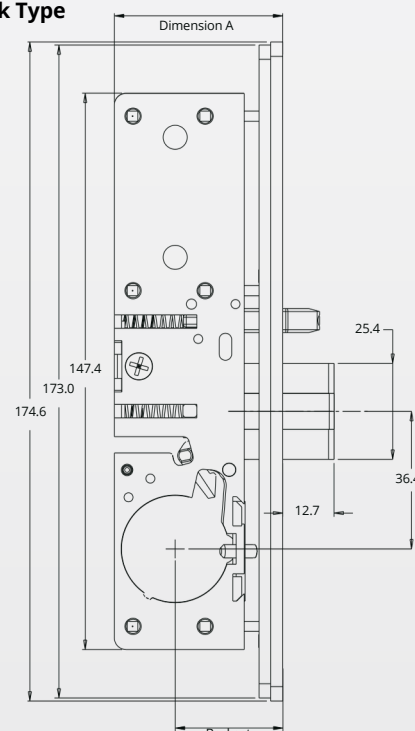

Handing of doors for locks

The description of swinging door operation always viewed from the outside.

LH: Door hinges on left

RH: Door hinges on right

