

### Features

- Range of back sets available
- Locks accept standard 37/32" 29.37mm mortice key or thumbturn cylinder
- Faceplate finish SAA
- Industry standard ANSI cut outs
- Europrofile or round mortise cylinder options
- Latch hold back facility
- Latches compatible for use with electric strikes

### Functionality

Deadlatches offer flexible control of situations and can be used in conjunction with electric strikes to provide the added option of remote access control. Designed to operate on doors with 3mm door gaps, the deadlatches can also be operated with the 459 paddle handle (cam plug required).

Code	Description	For use with	Finish
<b>5245101</b>	Deadlatch to suit round mortise cylinder $1\frac{1}{8}$ " back set (RH)		N/A
<b>5245102</b>	Deadlatch to suit round mortise cylinder $1\frac{1}{8}$ " back set (LH)		N/A
<b>5245103</b>	Deadlatch to suit round mortise cylinder 31/32" back set (RH)		N/A
<b>5245104</b>	Deadlatch to suit round mortise cylinder 31/32" back set (LH)		N/A
<b>5245105</b>	Alpro Deadlatch to suit round mortise cylinder complete with strike plate $1\frac{1}{2}$ " back set <b>R</b>		N/A
<b>52FP4511</b>	Flat faceplate - width 25mm	4570/4510	SAA
<b>52FP4512</b>	Radius faceplate - width 25mm	4570/4510	SAA
<b>52FP4513</b>	Radius faceplate with weather strip - width 25mm	4570/4510	SAA
<b>5235</b>	Strike plate		N/A
<b>5245-FIX-KIT</b>	Deadlatch fixing kit - width 25mm	4570/4510	N/A
<b>5245ESP</b>	Extended strike plate	4570/4510	N/A

For details of the faceplate variants available, see page 14.



Imperial Backset	Metric Equivalent	Dimension A
31/32"	24.6 mm	41.4mm
$1\frac{1}{8}$ "	28.6 mm	45.2mm
$1\frac{1}{2}$ "	38.1 mm	50 mm

### Handing of doors for locks

The description of swinging door operation always viewed from the outside.

LH: Door hinges on left

RH: Door hinges on right

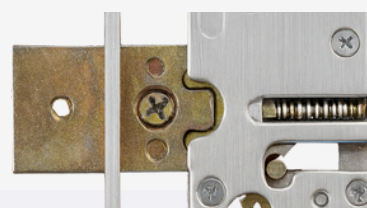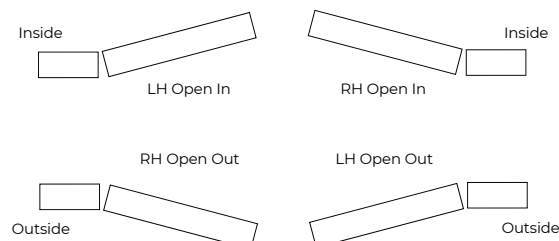

**R = Reversible Handing**

### 524510 Lock Type

