

ANSI Electric Strike

AL110

alpro





The Alpro AL110 series is an ANSI style security strike complete with stainless steel short or long faceplate for use in metal, timber and some composite door applications.

Compact Cast Aluminium Body

35mm overall depth

Deep Jaw

Accepts 13mm latch bolt

Low Current Consumption

200mA - 12V DC continuous (±15%) 100mA - 24V DC continuous (±15%)

Simple Fail Safe/Fail Secure

Changeover Easy Installation

Stick on/peel off template

Monitored and Lipless Versions Available Weather Resistant - IP56 Protection as Standard

Options

ANSI short or long faceplates Extension lips to be purchased separately, available in – 15, 25, 50 and 75mm (pre- drilled strike body)

Approvals

EN 61000-6-3 : 2021 EN 61000-4-2 : 2009 EN 61000-4-8 : 2010 EN 61000-4-6 : 2014

Lock Compatibility

Accepts 13mm latch bolt when fitted with 3mm door

- 1. Long /Short Faceplate, Standard Strike
- 2. Long / Short Faceplate, Monitored Strike
- 3. Long / Short Faceplate, Lipless Strike



Ordering Information

Description

12/24VDC ANSI Short SS Strike including mounting kit 12/24VDC ANSI Short SS Strike including mounting kit 12/24VDC ANSI Long SS Strike including mounting kit 12/24VDC ANSI Long SS Strike including mounting kit 12/24VDC ANSI Short SS Strike including mounting kit 12/24VDC ANSI Short SS Strike including mounting kit 12/24VDC ANSI Long SS Strike including mounting kit 12/24VDC ANSI Long SS Strike including mounting kit 12/24VDC ANSI Short SS Strike including mounting kit 12/24VDC ANSI Short SS Strike including mounting kit 12/24VDC ANSI Long SS Strike including mounting kit 12/24VDC ANSI Long SS Strike including mounting kit 12/24VDC ANSI Long SS Strike including mounting kit

Fail Secure / PTO	AL112AS
Fail Safe / PTL	AL111BS
Fail Secure / PTO	AL112BS
Fail Safe / PTL - Monitored	AL111AS-M
Fail Secure / PTO - Monitored	AL112AS-M
Fail Safe / PTL - Monitored	AL111BS-M
Fail Secure / PTO - Monitored	AL112BS-M

Function

Fail Safe / PTL

Fail Safe / PTL - Lipless

Fail Secure / PTO - Lipless

Fail Safe / PTL - Lipless

Fail Secure / PTO - Lipless

AL111AS-0

AL111BS-0

AL112BS-0

Accessories

15mm Extension Lip
25mm Extension Lip
50mm Extension Lip
75mm Extension Lip
Rectifier Sounder Module
13mm Rebate Plate
Radius Brushed Aluminium Faceplate
Euro Sashlock Faceflate Non-Handed
UK Sashlock Faceflate Non-Handed

ALEX1115
ALEX1125
ALEX1150
ALEX1175
IEC-RM1
ALS1113
AL110RADIUS
AL110SLEU
AL110SLUK

Code

AL111AS


Illustrated AL110 ANSI short metal door preparation

(BS) ANSI long faceplate 200 x 35

(AS) ANSI short faceplate 124 x 31

15, 25, 50 & 75mm Extension Lips are available as extras

Note: For detail of installation see instructions/template

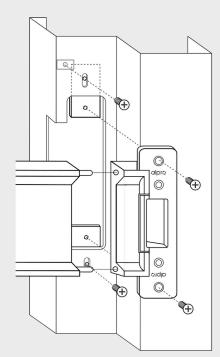

(BS) ANSI Long Faceplate (AS) ANSI Short Faceplate Overall depth 35mm Lipless version 34.0 alpro \bigcirc alpro \bigcirc \bigcirc 124 86 38 105 200 86 38 183 \bigcirc \bigcirc albro albro R 4.0

All dimensions are shown in mm.

