

# alpro

## ANSI Electric Strike EL900



The Alpro EL900 is a compact electric strike complete with long or short faceplates for use in metal, timber or composite door applications.

An 25mm extension lip is also included with in the kit.

### Construction

Compact body design - 35mm depth

### Function

Innovative function change over from fail secure (PTO) / fail safe (PTL)

### Electrical Features

Low current consumption

### Accessories

Long and short ANSI stainless steel faceplates supplied as standard  
25mm extension supplied as standard  
Mounting Kit supplied as standard

### Technical Information

Power consumption and current draw  
12v DC - 300mA  
24v DC - 150mA

The EL900 can be used in either fail safe (PTL) or fail secure (PTO) mode. Simply ensure that the screw is positioned in either hole as per the illustration and either function can be achieved.

### Retain the screw for future use (PTO).

#### Wiring

Red  
+  
12V DC  
-  
Red

#### Monitoring

Blue — ○ NC  
Green — ○ C  
Yellow — ○ NO



**3 YEAR GUARANTEE**

## Ordering Information

### Description

12v DC ANSI complete with SS Short/Long Faceplate

and 25mm Extension Lip

12v DC ANSI monitored complete with SS Short/Long Faceplate  
and 25mm Extension Lip

12v DC ANSI complete with SS Short/Long Faceplate and  
25mm Extension Lip

12v DC ANSI monitored complete with SS Short/Long Faceplate  
and 25mm Extension Lip

24v DC ANSI complete with SS Short/Long Faceplate  
and 25mm Extension Lip

24v DC ANSI monitored complete with SS Short/Long Faceplate  
and 25mm Extension Lip

24v DC ANSI complete with SS Short/Long Faceplate  
and 25mm Extension Lip

24v DC ANSI monitored complete with SS Short/Long  
Faceplate and 25mm Extension Lip

### Function

### Code

Fail Safe / PTL

**EL901**

Fail Safe / PTL

**EL901M**

Fail Secure / PTO

**EL902**

Fail Secure / PTO

**EL902M**

Fail Safe / PTL

**EL903**

Fail Safe / PTL




**EL903M**

Fail Secure / PTO

**EL904**

Fail Secure / PTO

**EL904M**

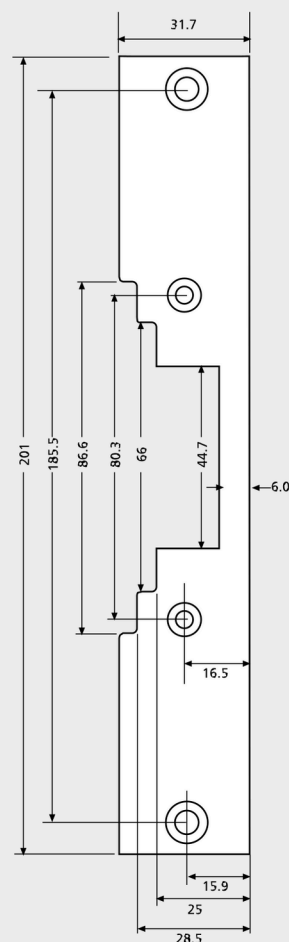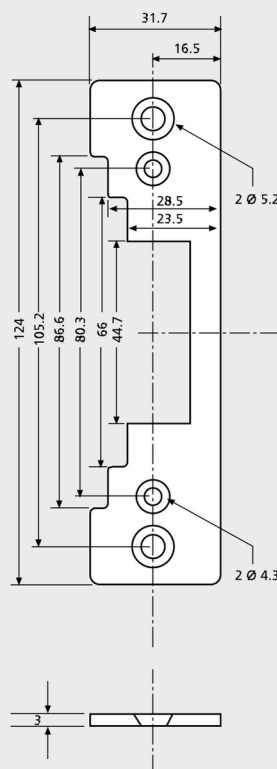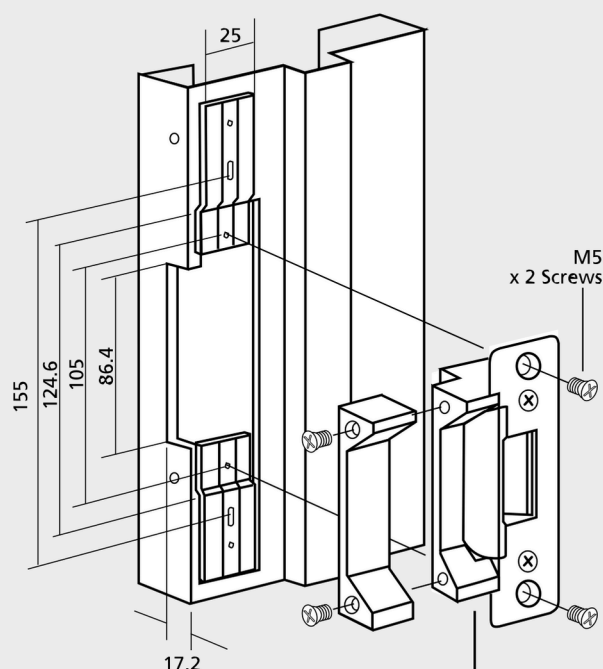


Fail Secure - (PTO)  
Screw Fitted



Fail Safe - (PTL)  
Screw Fitted in park  
hole



Short/Long SS face plate  
options and 25mm  
Extension Lip included in  
Strike Kit



All dimensions are shown in mm.