

alpro

ANSI Electric Strike

AL110



The Alpro AL110 series is an ANSI style security strike complete with stainless steel short or long faceplate for use in metal, timber and some composite door applications.

12/24VDC Selectable

Compact Cast Aluminium Body

35mm overall depth

Low Current Consumption

200mA - 12VDC continuous ($\pm 15\%$)

100mA - 24VDC continuous ($\pm 15\%$)

Simple Fail Safe/Fail Secure

Changeover Easy Installation

Stick on/peel off template

Monitored and Lipless Versions Available

Weather Resistant - IP56 Protection as Standard

Options

ANSI short or long faceplates

Extension lips to be purchased separately, available in - 15, 25, 50 and 75mm (pre-drilled strike body)

Approvals

EN 61000-6-3 : 2021

EN 61000-4-2 : 2009

EN 61000-4-8 : 2010

EN 61000-4-6 : 2014

EN IEC 6100-4-3 : 2020

Lock Compatibility

Accepts 13mm latch bolt when fitted with 3mm door gap.

1. Long /Short Faceplate, Standard Strike
2. Long / Short Faceplate, Monitored Strike
3. Long / Short Faceplate, Lipless Strike

6 YEAR GUARANTEE

Ordering Information

Description

12/24VDC ANSI Short SS Strike including mounting kit
 12/24VC ANSI Short SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Short SS Strike including mounting kit
 12/24VC ANSI Short SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Short SS Strike including mounting kit
 12/24VC ANSI Short SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit

Function

Fail Safe / PTL
 Fail Secure / PTO
 Fail Safe / PTL
 Fail Secure / PTO
 Fail Safe / PTL - Monitored
 Fail Secure / PTO - Monitored
 Fail Safe / PTL - Monitored
 Fail Secure / PTO - Monitored
 Fail Safe / PTL - Lipless
 Fail Secure / PTO - Lipless
 Fail Safe / PTL - Lipless
 Fail Secure / PTO - Lipless

Code

AL111AS
 AL112AS
 AL111BS
 AL112BS
 AL111AS-M
 AL112AS-M
 AL111BS-M
 AL112BS-M
 AL111AS-0
 AL112AS-0
 AL111BS-0
 AL112BS-0

Accessories

15mm Extension Lip
 25mm Extension Lip
 50mm Extension Lip
 75mm Extension Lip
 Rectifier Sounder Module
 13mm Rebate Plate
 Radius Brushed Aluminium Faceplate
 Euro Sashlock Faceplate Non-Handed
 UK Sashlock Faceplate Non-Handed

ALEX1115
 ALEX1125
 ALEX1150
 ALEX1175
 IEC-RM1
 ALS1113
 AL110RADIUS
 AL110SLEU
 AL110SLUK


Illustrated AL110 ANSI short metal door preparation

(BS) ANSI long faceplate 200 x 35

(AS) ANSI short faceplate 124 x 31

15, 25, 50 & 75mm Extension Lips are available as extras

Note: For detail of installation see instructions/template

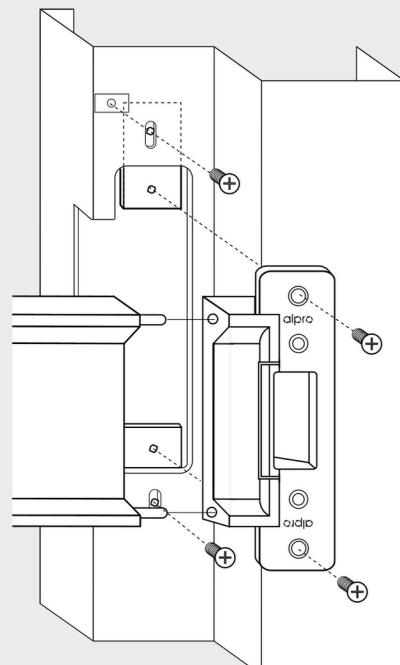

All dimensions are shown in mm.

