

# alpro

## Monitored Electric Strike AL2000



The Alpro AL2000 series high security monitored strikes are designed for timber and metal door applications.

### 12/24V Selectable

### High Security

Stainless steel one part body and striker

### Holding Force

1,380kg (3,000lb)

### Monitoring

Latch and door monitoring

Anti-tamper monitoring

### Compact Shallow Body

26mm overall depth

### Low Current Consumption

220mA - 12V DC continuous ( $\pm 15\%$ )

110mA - 24V DC continuous ( $\pm 15\%$ )

### Simple Fail Safe / Fail Secure Changeover

### Installation

Stick on / peel off template

### Weather Resistant - IP56 Protection as Standard

### Options

Extension lips (to be purchased separately)  
available in- 15, 25, 50 and 75mm (pre-drilled  
strike body)

### Approvals

EN 61000-6-3 : 2021

EN 61000-4-2 : 2009

EN 61000-4-8 : 2010

EN 61000-4-3 : 2020

EN 61000-4-6 : 2014

### AC Compatibility (with RM1)

The Rectifier Sounder Module enables operation with AC voltages. The sounder can be set for either buzzing or silence with both AC and DC voltages. The IEC RM1 unit is continuously rated - max 1 amp.



6 YEAR GUARANTEE

Monitored Electric Strike - AL2000

## Lock Compatibility

Accepts 15mm latch bolt when fitted with 3mm door gap

## Ordering Information

### Description

- 12/24V DC Monitored Strike including mounting kit
- 12/24V DC Monitored Strike including mounting kit
- 12/24V DC Monitored Strike including mounting kit - lipless
- 12/24V DC Monitored Strike including mounting kit - lipless

### Function

- Fail Safe / PTL
- Fail Secure / PTO
- Fail Safe / PTL
- Fail Secure / PTO

### Code


- AL2001
- AL2002
- AL2001-0
- AL2002-0

### Accessories

- 15mm Extension Lip
- 25mm Extension Lip
- 50mm Extension Lip
- 75mm Extension Lip
- Rectifier Sounder Module

Note: For detail of installation see instructions/template

Overall depth 26mm

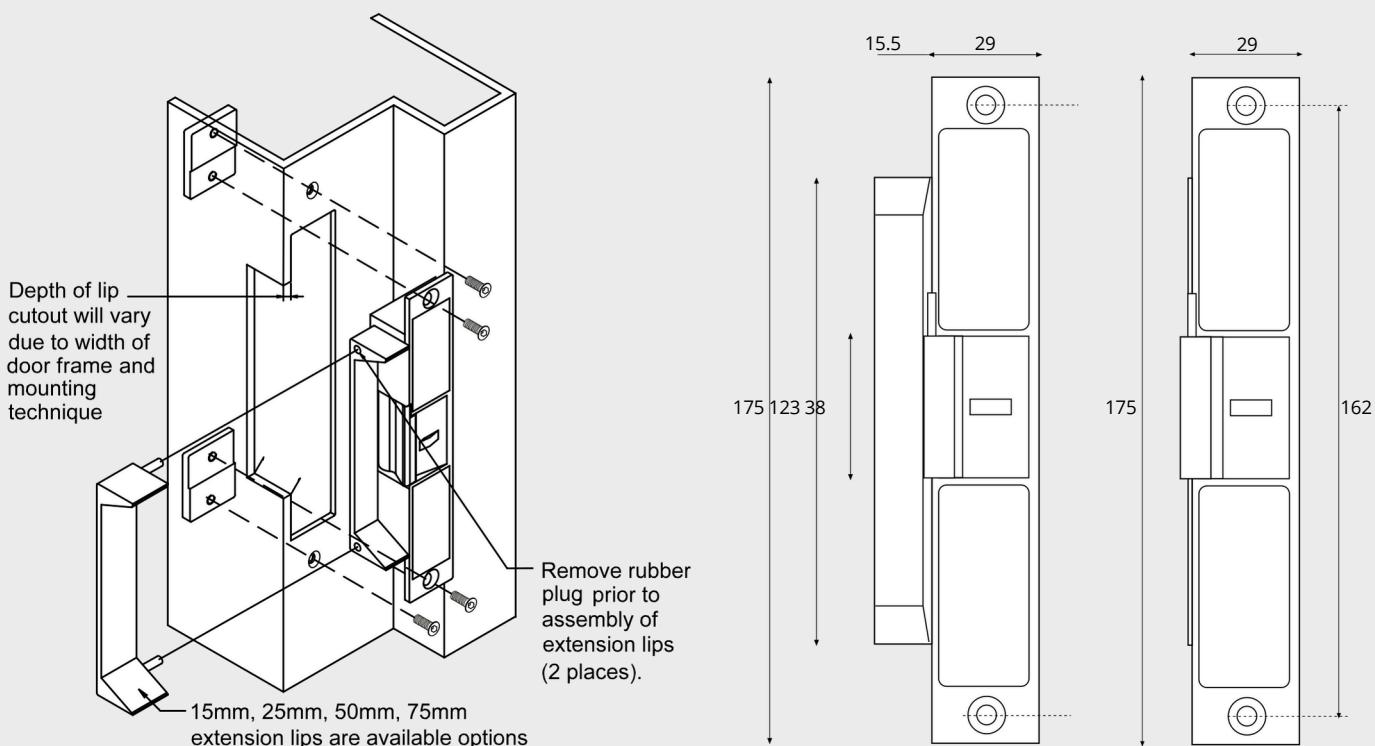

All dimensions are shown in mm.