

alpro

ANSI Electric Strike EL900



The Alpro EL900 is a compact electric strike complete with long or short faceplates for use in metal, timber or composite door applications.

An 25mm extension lip is also included with in the kit.

Construction

Compact body design - 35mm depth

Function

Innovative function change over from fail secure (PTO) / fail safe (PTL)

Electrical Features

Low current consumption

Accessories

Long and short ANSI stainless steel faceplates supplied as standard

25mm extension supplied as standard

Mounting Kit supplied as standard

Technical Information


Power consumption and current draw

12v DC - 300mA

24v DC - 150mA

The EL900 can be used in either fail safe (PTL) or fail secure (PTO) mode. Simply ensure that the screw is positioned in either hole as per the illustration and either function can be achieved.


Retain the screw for future use (PTO).

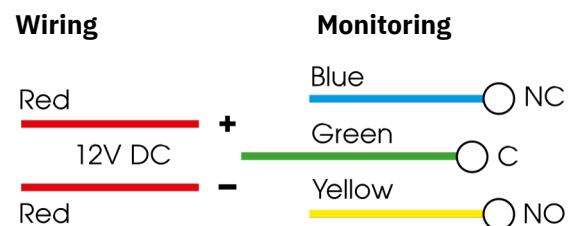

3 YEAR GUARANTEE

Ordering Information

Description	Function	Code
12v DC ANSI complete with SS Short/Long Faceplate and 25mm Extension Lip	Fail Safe / PTL	EL901
12v DC ANSI monitored complete with SS Short/Long Faceplate and 25mm Extension Lip	Fail Safe / PTL	EL901M
12v DC ANSI complete with SS Short/Long Faceplate and 25mm Extension Lip	Fail Secure / PTO	EL902
12v DC ANSI monitored complete with SS Short/Long Faceplate and 25mm Extension Lip	Fail Secure / PTO	EL902M
24v DC ANSI complete with SS Short/Long Faceplate and 25mm Extension Lip	Fail Safe / PTL	EL903
24v DC ANSI monitored complete with SS Short/Long Faceplate and 25mm Extension Lip	Fail Safe / PTL	EL903M
24v DC ANSI complete with SS Short/Long Faceplate and 25mm Extension Lip	Fail Secure / PTO	EL904
24v DC ANSI monitored complete with SS Short/Long Faceplate and 25mm Extension Lip	Fail Secure / PTO	EL904M

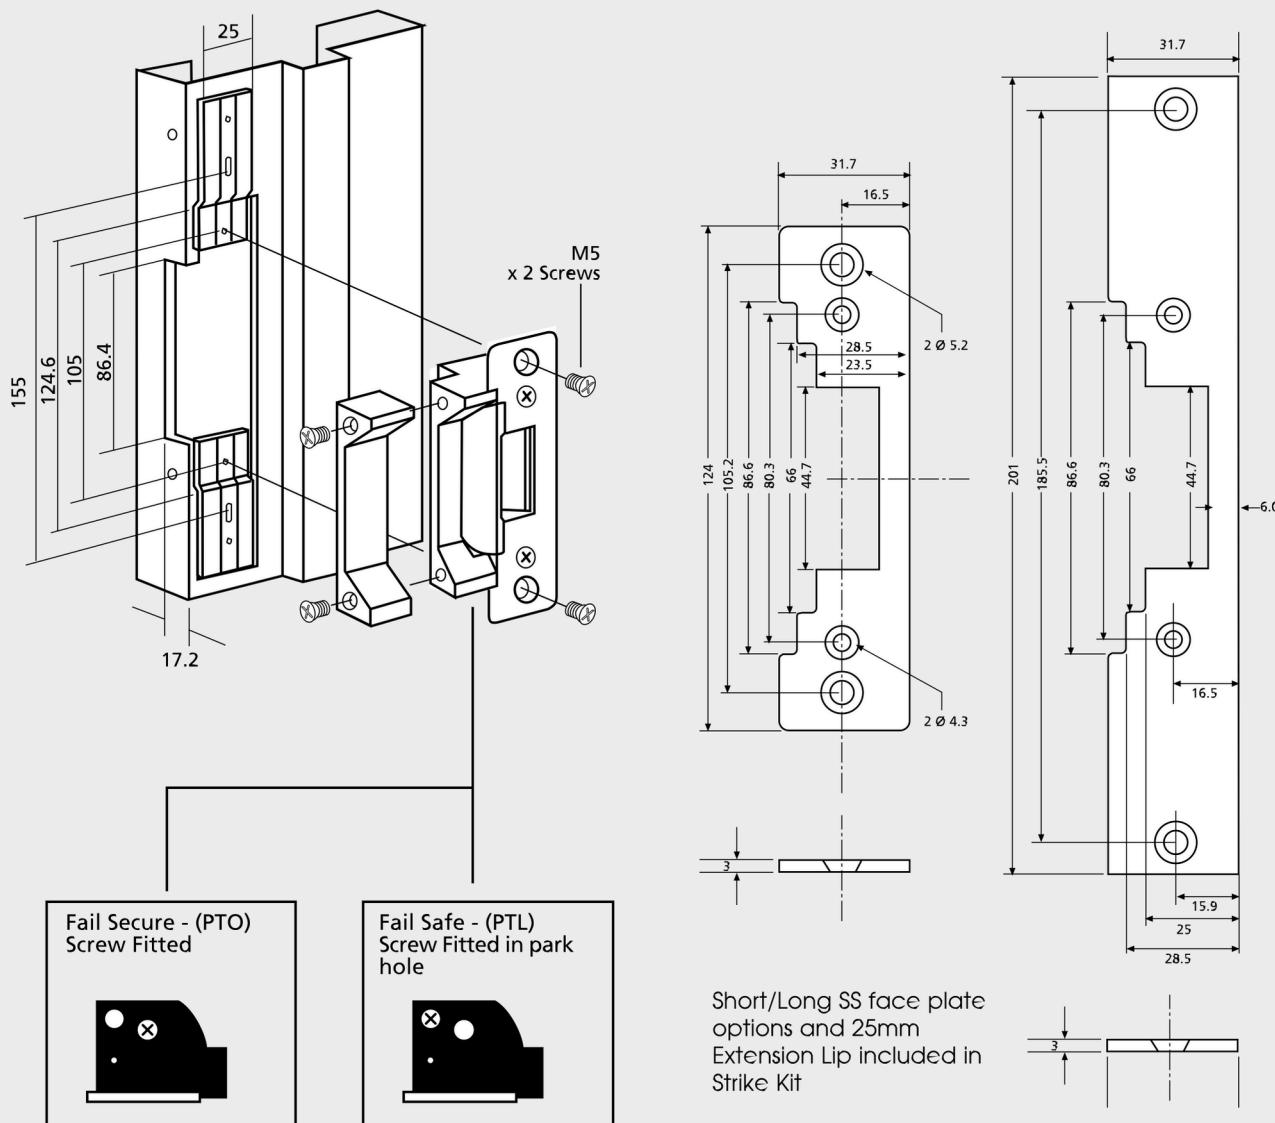

All dimensions are shown in mm.