

# alpro

## Deadlocking Bolt

### DB38



The Alpro DB38 incorporates the latest design innovations to be applied to the manufacture of a transverse action deadlocking solenoid bolt.

The DB38 offers the highest level of security, quality electronic ingenuity as the DB25 but with increased strength primarily achieved by utilising a larger diameter bolt pin, the DB38 is the preferred option when high physical strength is needed. The advanced microprocessor module provides power reduction allowing for continuous operation without heat generation as well as automatic voltage regulation, dual monitoring and access control features.

#### High Physical Security

Automatic deadlocking. Bolt throw 14mm.

#### Robust Construction

All stainless steel bolt pin of 14.2mm diameter, linkages and springs. 3mm stainless steel faceplate and strike plates with fully enclosed mechanism.

#### Versatile Installation

Mortice mount horizontally or vertically, on single or double action doors. Surface mount with the aid of the DB38 accessories, including mounting onto glass.

#### Physical Dimensions

203mm (L) x 37.5mm (W) x 44mm (D)

#### Multiple Voltage Input

Any voltage from 12VDC - 24VDC  
Thermal overheating protection, complete with built in transient and reverse polarity protection and continuously rated solenoid.

#### Low Current Consumption

Volts Current - Activate Current - Hold (after 200ms)

12VDC	1500mA	230mA
24VDC	1400mA	90mA

#### Dual Monitoring

Bolt and door position switches

#### Accessories

Strike box and housing kit  
Stainless steel strike plate with square hole  
Glass surface mount kit  
dress plate

#### Compliance

- Electromagnetic Compatibility - Directive 2014/30/EU
- Restriction of the Use of certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) Directive 2011/65/EU

## 5 YEAR GUARANTEE

Deadlocking Bolt - DB38



Surface mounting a lock and/or strike with the aid of a DB38 housing offers more flexibility in installation and makes securing glass doors possible. Dress plates are offered to give a 'clean' finish when a housing has been installed onto glass. Both the housing and dress plate are supplied with self-adhesive tape for instant application to glass doors and frames.

### Built-in Access Control Module

Selectable unlock period – a field selector timer once the bolt is signalled to unlock. This enables traffic exiting 0, 3, 6 or 9 seconds in which to open the door before it automatically relocks. See Anti-Tailgate.

Multiple auto relock function – when relocking the bolt makes 9 locking attempts over 18 seconds. Change in the Bolt Position Switch status indicates that the door has been locked. Fail safe models only.

Multiple unlock – in fail secure mode 5 attempts to unlock door at 2 second intervals.

Anti-Tailgate – once the door has been pushed open and closed during the chosen unlock period, the bolt will immediately relock.

### Ordering Information

#### Description

12-24VDC Deadlocking bolt 38mm with wide faceplate including strike plate and square hole

12-24VDC Deadlocking bolt 38mm with wide faceplate including strike plate with square hole

#### Accessories

Strike box and housing kit

Stainless steel strike plate with square hole

Glass surface mount kit dress plate

#### Function

Fail Safe / PTL

Fail Secure / PTO

#### Code


**DB38/PTLOCK**

**DB38/PTOPEN**

**DB38/SMH-KIT**

**DB38/SSP**

**DB38/SMK-DP**

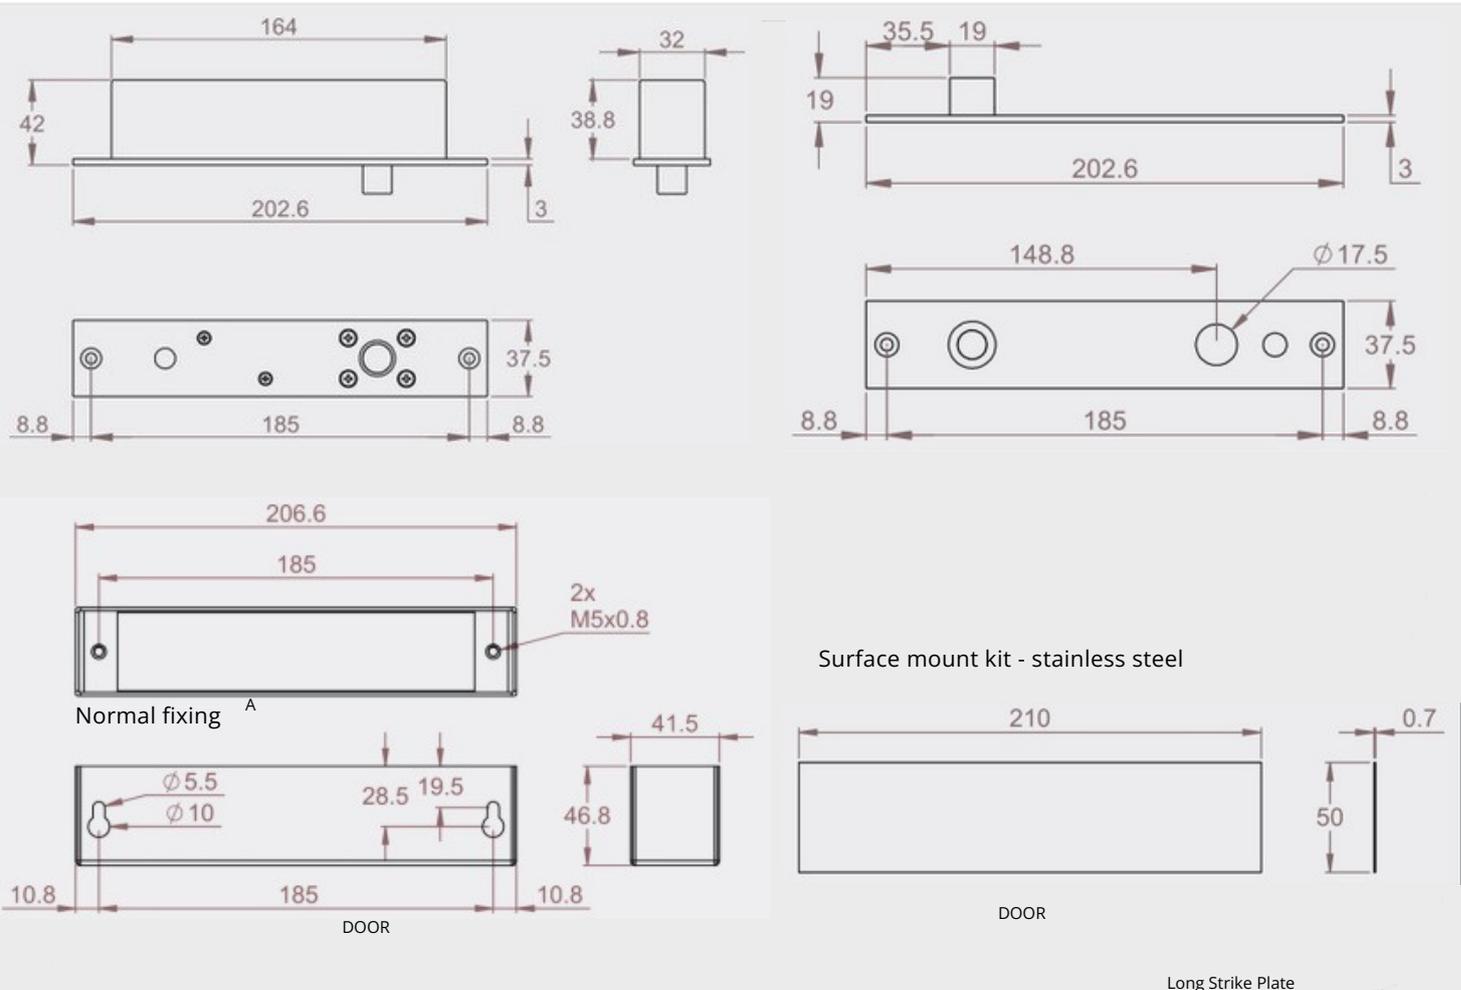

All dimensions are shown in mm.