

alpro

ANSI Electric Strike

AL110

1



2



3



The Alpro AL110 series is an ANSI style security strike complete with stainless steel short or long faceplate for use in metal, timber and some composite door applications.

12/24VDC Selectable

Compact Cast Aluminium Body

35mm overall depth

Low Current Consumption

200mA - 12VDC continuous ($\pm 15\%$)

100mA - 24VDC continuous ($\pm 15\%$)

Simple Fail Safe/Fail Secure

Changeover Easy Installation

Stick on/peel off template

Monitored and Lipless Versions Available

Weather Resistant

Options

ANSI short or long faceplates

Extension lips to be purchased separately, available in - 15, 25, 50 and 75mm (pre-drilled strike body)

Compliance

- Electromagnetic Compatibility - Directive 2014/30/EU
- Restriction of the Use of certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) Directive 2011/65/EU

Lock Compatibility

Accepts 13mm latch bolt when fitted with 3mm door gap.

1. Long /Short Faceplate, Standard Strike
2. Long / Short Faceplate, Monitored Strike
3. Long / Short Faceplate, Lipless Strike



6 YEAR WARRANTY

Ordering Information

Description

12/24VDC ANSI Short SS Strike including mounting kit
 12/24VC ANSI Short SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Short SS Strike including mounting kit
 12/24VC ANSI Short SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Short SS Strike including mounting kit
 12/24VC ANSI Short SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit
 12/24VDC ANSI Long SS Strike including mounting kit

Accessories

15mm Extension Lip
 25mm Extension Lip
 50mm Extension Lip
 75mm Extension Lip
 Rectifier Sounder Module
 13mm Rebate Plate
 Radius Brushed Aluminium Faceplate
 Euro Sashlock Faceplate Non-Handed
 UK Sashlock Faceplate Non-Handed

Function

Fail Safe / PTL
 Fail Secure / PTO
 Fail Safe / PTL
 Fail Secure / PTO
 Fail Safe / PTL - Monitored
 Fail Secure / PTO - Monitored
 Fail Safe / PTL - Monitored
 Fail Secure / PTO - Monitored
 Fail Safe / PTL - Lipless
 Fail Secure / PTO - Lipless
 Fail Safe / PTL - Lipless
 Fail Secure / PTO - Lipless

Code


AL111AS
AL112AS
AL111BS
AL112BS
AL111AS-M
AL112AS-M
AL111BS-M
AL112BS-M
AL111AS-0
AL112AS-0
AL111BS-0
AL112BS-0
ALEX1115
ALEX1125
ALEX1150
ALEX1175
IEC-RM1
ALS1113
AL110RADIUS
AL110SLEU
AL110SLUK

Illustrated AL110 ANSI short metal door preparation

(BS) ANSI long faceplate 200 x 35
 (AS) ANSI short faceplate 124 x 31


15, 25, 50 & 75mm Extension Lips are available as extras

Note: For detail of installation see instructions/template

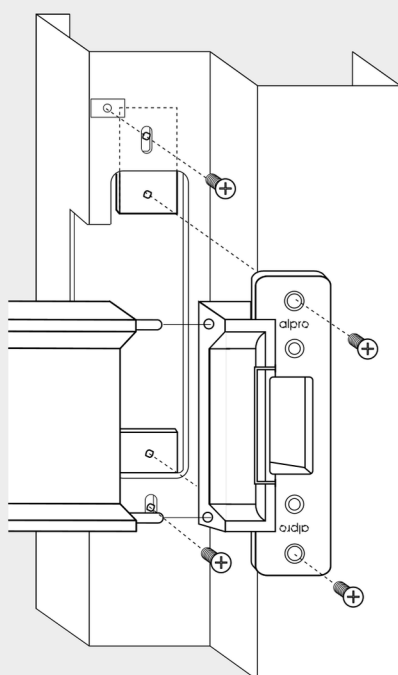

(BS) ANSI Long Faceplate

(AS) ANSI Short Faceplate

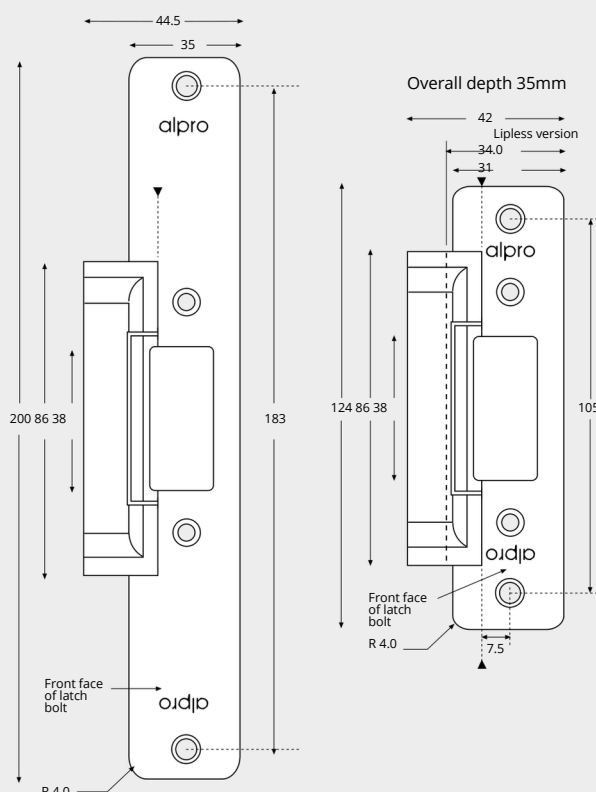

All dimensions are shown in mm.