

alpro

Europrofile Deadlocks

52220 Lock Type



Deadlocks are available in both bar and hookbolt versions. The locks provide security deadlocking for a variety of aluminium doors including swinging and sliding applications.

The hookbolt is constructed from stainless steel and is a 5 ply laminated construction, with the centre core case hardened, complete with hardened roll pin to resist hacksaw attack.

All locks are designed to accept standard europrofile cylinders or thumbturns.

Range of backsets available

Faceplate finish SAA

Stainless steel laminated lockbolts

Locks accept standard 17mm
Europrofile cylinders and thumbturn

Microswitch option available wiring detail


- Common : Green
- Normally Open: Blue
- Normally Closed: Red
- Common: Yellow
- Normally Open: White
- Normally Closed: Black

Accessories available

- Lock cylinders
- Faceplates



RIVNUT

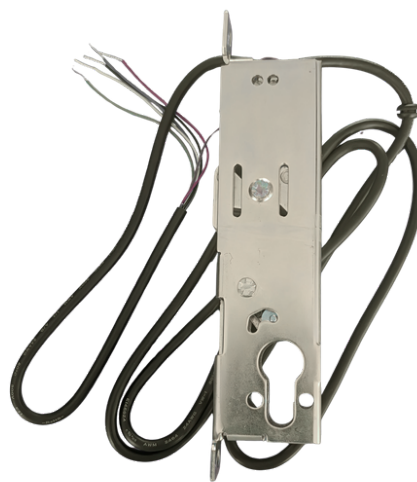

MICROSWITCH



3 YEAR WARRANTY

Ordering Information

Description

Narrow stile hookbolt lock

To suit 17mm Europrofile cylinder - 25mm backset
 To suit 17mm Europrofile cylinder - 25mm backset with RIV nut fixing
 To suit 17mm Europrofile cylinder - 30mm backset
 To suit 17mm Europrofile cylinder - 30mm backset with RIV nut fixing
 To suit 17mm Europrofile cylinder - 40mm backset
 Flat faceplate width 25mm, SAA finish, for use with hook lock
 Radius faceplate width 25mm, SAA finish, for use with hook lock
 Radius faceplate with weather strip - width 25mm, SAA finish, for use with hook lock

Dimension A

Code


41mm 5222025*
 41mm 5222025R*
 46mm 5222030*
 46mm 5222030R*
 56mm 5222040*
 52FP222
 52FP225
 52FP228

Narrow stile barbolt lock

To suit 17mm Europrofile cylinder - 25mm backset
 To suit 17mm Europrofile cylinder - 30mm backset
 Flat faceplate width 25mm, SAA finish, for use with barbolt
 Radius faceplate width 25mm, SAA finish, for use with barbolt

41mm 5222125*
 46mm 5222130*
 52FP221
 52FP225/B

***NB - For microswitch please add "M" to end of code.**

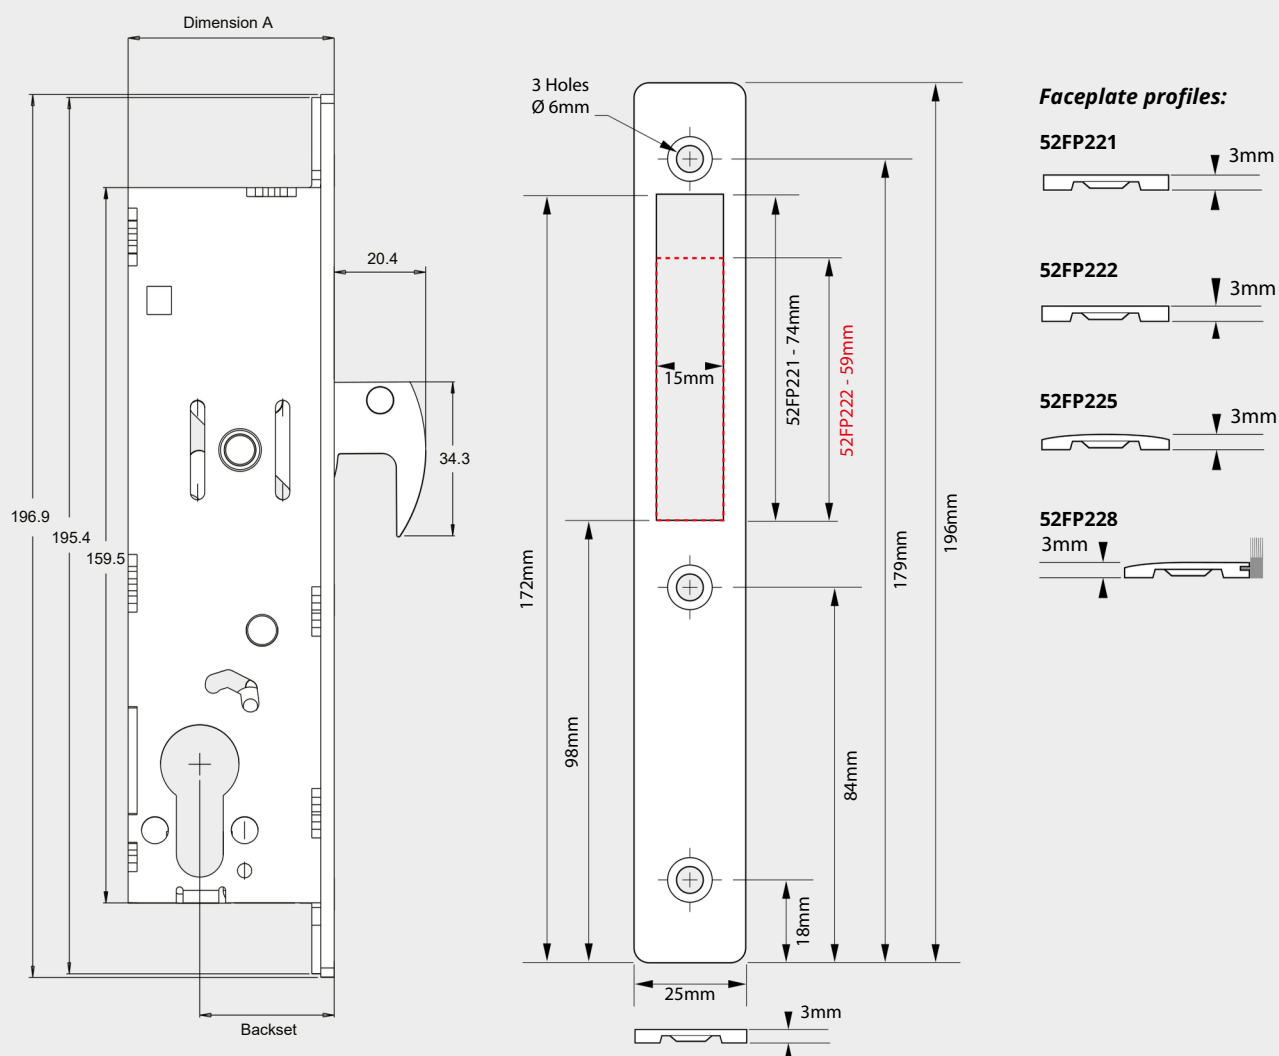

All dimensions are shown in mm.