

alpro

Flushbolts



Flushbolts are used to facilitate the locking of the inactive leaf of a pair of aluminium, steel or timber doors.

Complete with the necessary flushbolt guide and optional spring loaded floor sockets, the bolts allow both a secure and aesthetically pleasing locking solution.

Die cast zinc alloy operation mechanism. Available in Silver finish.

Complete with bolt guide.

Spring loaded floor sockets available on request.

Flat or radius profiles available.

Ordering Information

Description


Flat flushbolt - complete with guide
 Radius flushbolt - complete with guide
 Floor socket
 Bolt guide

Finish

SAA
 SAA
 -
 -

Code

60FSAA
60RSAA
60FS
60BG

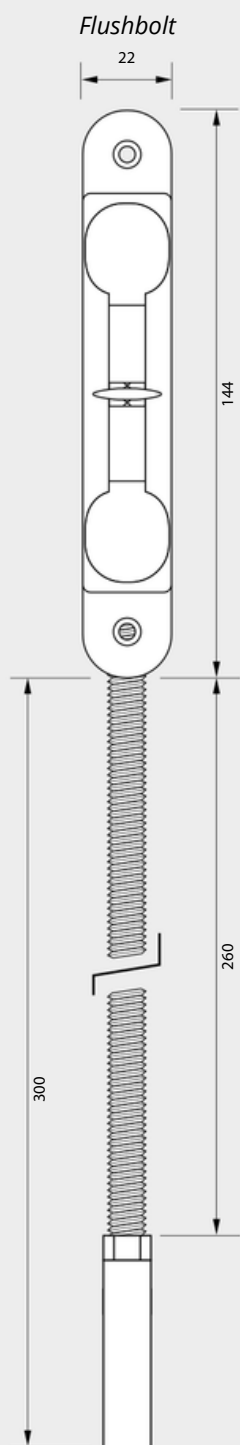

All dimensions are shown in mm.