alpro

Europrofile Cylinder Deadlatch

524570 Lock Type

Deadlatches offer flexible control of situations and can be used in conjunction with electric strikes to provide the added option of remote access control. Designed to operate on doors with 3mm door gaps.

Features

- Range of backsets available
- Faceplate finish SAA
- Locks accept standard 17mm Europrofile cylinders and thumbturns
- Industry standard ANSI cut outs
- Europrofile or round mortice cylinder options
- Latch hold back facility
- Latches compatible for use with electric strikes

Europrofile Cylinder Deadlatch - **524570 Lock Type**

3 YEAR WARRANTY

Ordering Information

Description	Code
Deadlatch to suit 17mm Europrofile cylinder 25mm backset (RH)	**5245701**
Deadlatch to suit 17mm Europrofile cylinder 25mm backset (RH) - Alleygate version with bolt and cylinder rotation pin	**5245701SE**
Deadlatch to suit 17mm Europrofile cylinder 25mm backset (LH)	**5245702**
Deadlatch to suit 17mm Europrofile cylinder 25mm backset (LH) - Alleygate version with bolt and cylinder rotation pin	**5245702SE**
Deadlatch to suit 17mm Europrofile cylinder 28mm backset (RH)	**5245703**
Deadlatch to suit 17mm Europrofile cylinder 28mm backset (LH)	**5245704**
Deadlatch to suit 17mm Europrofile cylinder 38mm backset (RH)	**5245705**
Deadlatch to suit 17mm Europrofile cylinder 38mm backset (LH)	**5245706**
Flat faceplate SAA - width 25mm	**52FP4511**
Radius faceplate SAA - width 25mm	**52FP4512**
Radius faceplate with weather strip SAA- width 25mm	**52FP4513**
Strike plate	**5235**
Deadlatch fixing kit - width 25mm	**5245-FIX-KIT**
Extended strike plate	**5245ESP**

Metric Backset	Dimension A
25mm	41.4mm
28mm	45.2mm
38mm	57.1mm

Handing of doors for locks

The description of swinging door operation always viewed from the outside.

LH: Door hinges on left RH: Door hinges on right

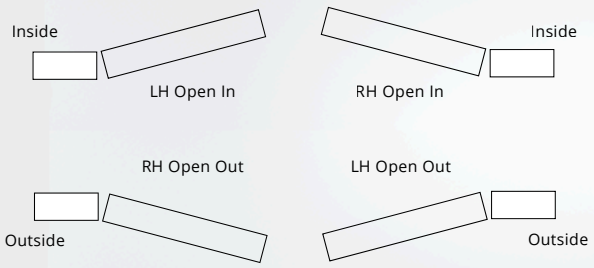

524570 Lock Type

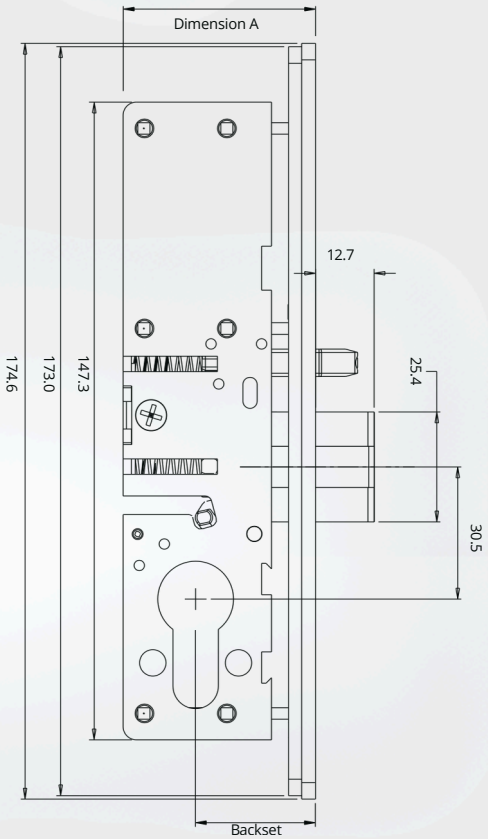

All dimensions are shown in mm.

Europrofile Cylinder Deadlatch - 524570 Lock Type

Harwell Road, Nuffield Estate, Poole, Dorset, BH17 0BD Tel: 01202 676262 I info@alpro.co.uk

Registered in England & Wales 1925337 | © February 2020 IEC. All rights reserved | All dimensions are nominal and subject to tolerances.