alpro

ANSI Electric Strike

EL900

NEW

The Alpro EL900 is a compact electric strike for use in metal or timber applications.

Accessories
Long and short ANSI stainless steel faceplates supplied as standard
25mm extension supplied as standard
Mounting Kit supplied as standard

Construction
Compact body design - 35mm depth

Dual Voltage
12/24VDC Selectable

Function
Innovative function change over from fail secure (PTO)/fail safe (PTL)

Electrical Features
Low current consumption

Technical Information
Power consumption and current draw
12VDC - 250mA
24VDC - 125mA

The EL900 can be used in either fail safe (PTL) or fail secure (PTO) mode. Controlled simply by the screw positioning in either hole as per the illustration and either function can be achieved.

Retain the screw for future use (PTO).

Compliance

- Electromagnetic Compatibility - Directive 2014/30/EU
- Restriction of the Use of certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) Directive 2011/65/EU

Wiring

Power consumption and current draw
12VDC - 250mA
24V DC-125mA

Monitoring

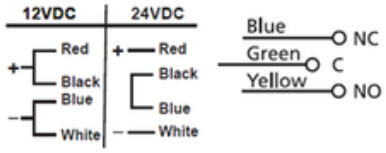

3 YEAR WARRANTY

ANSI Electric Strike - **EL900**

Ordering Information

Description	Code
Dual voltage ANSI complete with SS Short/Long Faceplate and 25mm Extension Lip	**EL900-DV**
Dual voltage ANSI monitored complete with SS Short/Long Faceplate and 25mm Extension Lip	**EL900M-DV**
Alpro 25mm Extension Lip to suit EL900 series	**EL900-EXT25**
Alpro 50mm Extension Lip to suit EL900 series	**EL900-EXT50**

The EL900 strikes are dual voltage and the function is easily interchangeable.
These strikes are set to Fail Safe/PTL as standard.

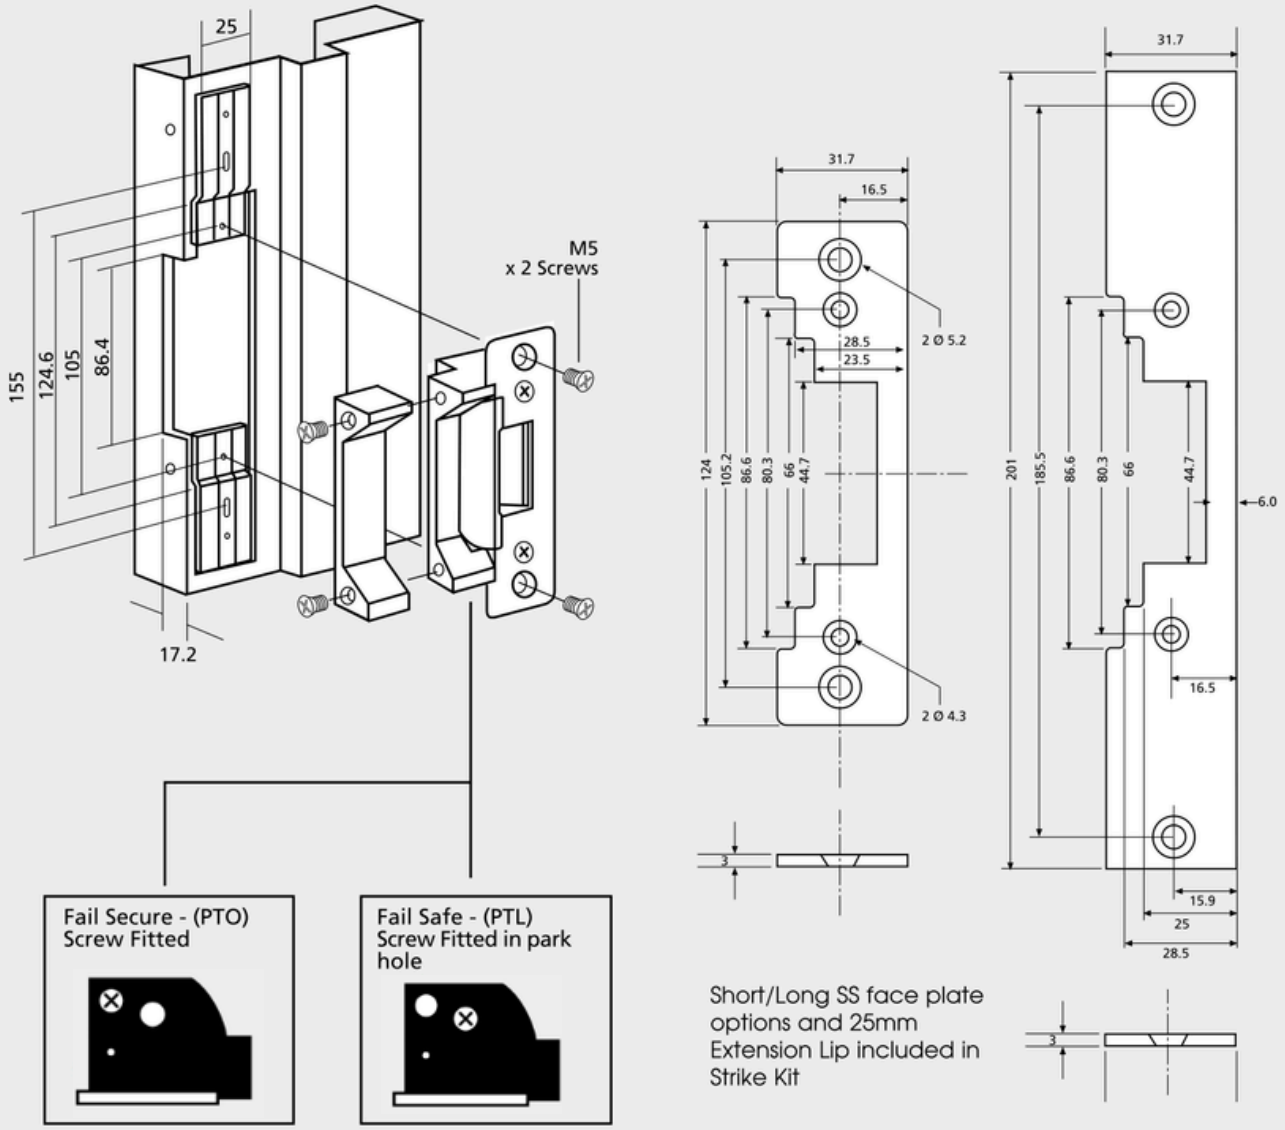

All dimensions are shown in mm.

Harwell Road, Nuffield Estate, Poole, Dorset, BH17 0BD Tel: 01202 676262 I info@alpro.co.uk
Registered in England & Wales 1925337 | © February 2020 IEC. All rights reserved | All dimensions are nominal and subject to tolerances.