alpro

ANSI Electric Strike

AL110

1



2



3



The Alpro AL110 series is an ANSI style security strike complete with stainless steel short or long faceplate for use in metal, timber and some composite door applications.

12/24VDC Selectable

Compact Cast Aluminium Body
35mm overall depth

Low Current Consumption
200mA - 12VDC continuous (±15%)
100mA - 24VDC continuous (±15%)

Simple Fail Safe/Fail Secure

Changeover Easy Installation
Stick on/peel off template

Monitored and Lipless Versions Available

Options

ANSI short or long faceplates
Extension lips to be purchased separately, available in – 15, 25, 50 and 75mm (pre- drilled strike body)

Compliance

- Electromagnetic Compatibility - Directive 2014/30/EU
- Restriction of the Use of certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) Directive 2011/65/EU

Lock Compatibility

Accepts 13mm latch bolt when fitted with 3mm door gap.

1. Long /Short Faceplate, Standard Strike
2. Long / Short Faceplate, Monitored Strike
3. Long / Short Faceplate, Lipless Strike

6 YEAR WARRANTY

Ordering Information

Description	Function	Code
12/24VDC ANSI Short SS Strike including mounting kit	Fail Safe / PTL	**AL111AS**
12/24VC ANSI Short SS Strike including mounting kit	Fail Secure / PTO	**AL112AS**
12/24VDC ANSI Long SS Strike including mounting kit	Fail Safe / PTL	**AL111BS**
12/24VDC ANSI Long SS Strike including mounting kit	Fail Secure / PTO	**AL112BS**
12/24VDC ANSI Short SS Strike including mounting kit	Fail Safe / PTL - Monitored	**AL111AS-M**
12/24VC ANSI Short SS Strike including mounting kit	Fail Secure / PTO - Monitored	**AL112AS-M**
12/24VDC ANSI Long SS Strike including mounting kit	Fail Safe / PTL - Monitored	**AL111BS-M**
12/24VDC ANSI Long SS Strike including mounting kit	Fail Secure / PTO - Monitored	**AL112BS-M**
12/24VDC ANSI Short SS Strike including mounting kit	Fail Safe / PTL - Lipless	**AL111AS-0**
12/24VC ANSI Short SS Strike including mounting kit	Fail Secure / PTO - Lipless	**AL112AS-0**
12/24VDC ANSI Long SS Strike including mounting kit	Fail Safe / PTL - Lipless	**AL111BS-0**
12/24VDC ANSI Long SS Strike including mounting kit	Fail Secure / PTO - Lipless	**AL112BS-0**

Accessories

15mm Extension Lip	**ALEX1115**
25mm Extension Lip	**ALEX1125**
50mm Extension Lip	**ALEX1150**
75mm Extension Lip	**ALEX1175**
Rectifier Sounder Module	**IEC-RM1**
13mm Rebate Plate	**ALS1113**
Radius Brushed Aluminium Faceplate	**AL110RADIUS**
Euro Sashlock Faceflate Non-Handed	**AL110SLEU**
UK Sashlock Faceflate Non-Handed	**AL110SLUK**


Illustrated AL110 ANSI short metal door preparation

(BS) ANSI long faceplate 200 x 35


(AS) ANSI short faceplate 124 x 31

15, 25, 50 & 75mm Extension Lips are available as extras


Note: For detail of installation see instructions/template

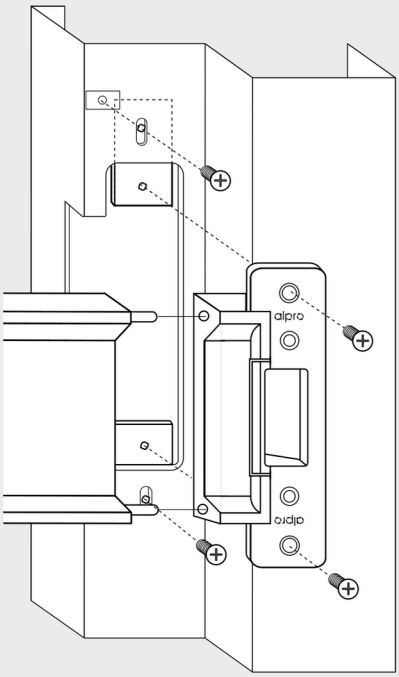

(BS) ANSI Long Faceplate

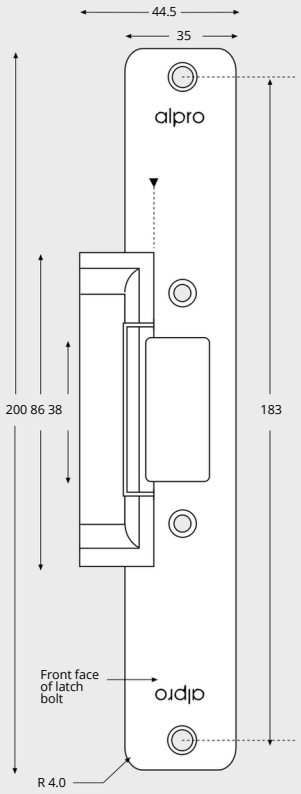

(AS) ANSI Short Faceplate

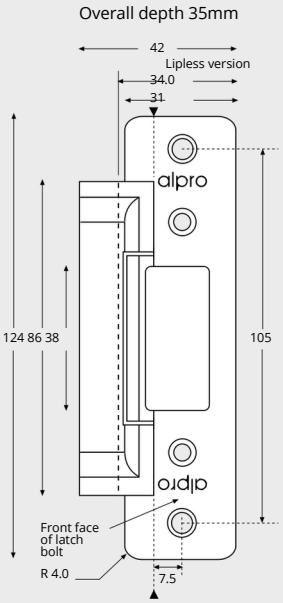

All dimensions are shown in mm.

All datasheets are version controlled please check alpro.co.uk to ensure this datasheet is the latest version.

Harwell Road, Nuffield Estate, Poole, Dorset, BH17 0BD Tel: 01202 676262 I info@alpro.co.uk

Registered in England & Wales 1925337 | © February 2020 IEC. All rights reserved | All dimensions are nominal and subject to tolerances.