# alpro

### ANSI Electric Strike

**AL110** 



The Alpro AL110 series is an ANSI style security strike complete with stainless steel short or long faceplate for use in metal, timber and some composite door applications.

#### 12/24v Selectable

Stainless Steel Face Plate and Striker

#### **Compact Cast Aluminium Body**

35mm overall depth

#### Deep Jaw

Accepts 13mm latch bolt

#### **Low Current Consumption**

200mA - 12V DC continuous (±15%) 100mA - 24V DC continuous (±15%)

#### Simple Fail Safe/Fail Secure Changeover

#### **Easy Installation**

Stick on/peel off template

#### **Monitored and Lipless Versions Available**

**Weather Resistant -** IP56 Protection as Standard

#### **Options**

ANSI short or long faceplates Extension lips to be purchased separately, available in – 15, 25, 50 and 75mm (predrilled strike body)

#### **Approvals**

EN 61000-6-3 : 2021 EN 61000-4-2 : 2009 EN 61000-4-8 : 2010 EN 61000-4-6 : 2014

#### **Lock Compatibility**

Accepts 13mm latch bolt when fitted with 3mm door



#### **Ordering Information**

12/24VDC ANSI Short SS Strike including mounting kit 12/24VC ANSI Short SS Strike including mounting kit 12/24VDC ANSI Long SS Strike including mounting kit

For monitored version add -M to code e.g. AL111AS-M For lipless version add -O to code e.g. AL111AS-O

12/24VDC ANSI Long SS Strike including mounting kit

## Function Code Fail Safe / PTL AL111AS Fail Secure / PTO AL112AS Fail Safe / PTL AL111BS

Fail Secure / PTO

#### **Accessories**

**Description** 

15mm Extension Lip
25mm Extension Lip
50mm Extension Lip
75mm Extension Lip
Rectifier Sounder Module
13mm Rebate Plate
Radius Brushed Aluminium Faceplate
Euro Sashlock Faceflate Non-Handed
UK Sashlock Faceflate Non-Handed

ALEX1115
ALEX1125
ALEX1150
ALEX1175
IEC-RM1
ALS1113
AL110RADIUS
AL110SLEU
AL110SLUK

AL112BS


Illustrated AL110 ANSI short metal door preparation

(BS) ANSI long faceplate 200 x 35

(AS) ANSI short faceplate 124 x 31

15, 25, 50 & 75mm Extension Lips are available as extras

Note: For detail of installation see instructions/template

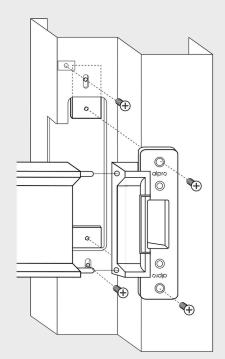

All dimensions are shown in mm.

#### (BS) ANSI Long Faceplate (AS) ANSI Short Faceplate Overall depth 35mm Lipless version alpro $\bigcirc$ alpro 124 86 38 105 200 86 38 183 $\bigcirc$ $\bigcirc$ albro albro R 4.0