

alpro

Deadlocking Bolt

DB38



The Alpro DB38 incorporates the latest design innovations to be applied to the manufacture of a transverse action deadlocking solenoid bolt. The DB38 offers the highest level of security, quality electronic ingenuity as the DB25 but with increased strength primarily achieved by utilising a larger diameter bolt pin, the DB38 is the preferred option when high physical strength is needed. The advanced microprocessor module provides power reduction allowing for continuous operation without heat generation as well as automatic voltage regulation, dual monitoring and access control features.

High Physical Security

Holding force 2,000kg - automatic deadlocking. Bolt throw 14mm.

Robust Construction

All stainless steel bolt pin of 14.2mm diameter, linkages and springs. 3mm stainless steel faceplate and strike plates with fully enclosed mechanism.

Versatile Installation

Mortice mount horizontally or vertically, on single or double action doors. Surface mount with the aid of the DB38 accessories, including mounting onto glass.

Physical Dimensions

203mm (L) x 37.5mm (W) x 44mm (D)

Multiple Voltage Input

Any voltage from 12V DC - 24V DC Thermal overheating protection, complete with built in transient and reverse polarity protection and continuously rated solenoid.

Low Current Consumption

Volts Current - Activate Current - Hold (after 200ms)

12V DC 1500mA 230mA

24V DC 1400mA 90mA

Dual Monitoring

Bolt and door position switches

Accessories

Strike box and housing kit Stainless steel strike plate with square hole Glass surface mount kit dress plate

Approvals

EN 61000-6-3 : 2021

EN 61000-4-2 : 2009

EN 61000-4-8 : 2010

EN 61000-4-3 : 2020

EN 61000-4-6 : 2014

5 YEAR GUARANTEE

Surface mounting a lock and/or strike with the aid of a DB38 housing offers more flexibility in installation and makes securing glass doors possible. Dress plates are offered to give a 'clean' finish when a housing has been installed onto glass. Both the housing and dress plate are supplied with self-adhesive tape for instant application to glass doors and frames.

Built-in Access Control Module

Selectable unlock period – a field selector timer once the bolt is signalled to unlock. This enables traffic exiting 0, 3, 6 or 9 seconds in which to open the door before it automatically relocks. See Anti-Tailgate.

Multiple auto relock function – when relocking the bolt makes 9 locking attempts over 18 seconds. Change in the Bolt Position Switch status indicates that the door has been locked. Fail safe models only.

Multiple unlock – in fail secure mode 5 attempts to unlock door at 2 second intervals.

Anti-Tailgate – once the door has been pushed open and closed during the chosen unlock period, the bolt will immediately relock.

Ordering Information

Description

12-24V DC Deadlocking bolt 38mm with wide faceplate including strike plate and square hole 12-24V DC
Deadlocking bolt - 38mm with wide faceplate including short strike plate with square hole

Accessories

Strike box and housing kit

Stainless steel strike plate with square hole

Glass surface mount kit dress plate

Function

Fail Safe / PTL

Fail Secure / PTO

Code


DB38/PTLOCK

DB38/PTOPEN

DB38/SMH-KIT

DB38/SSP

DB38/SMK-DP

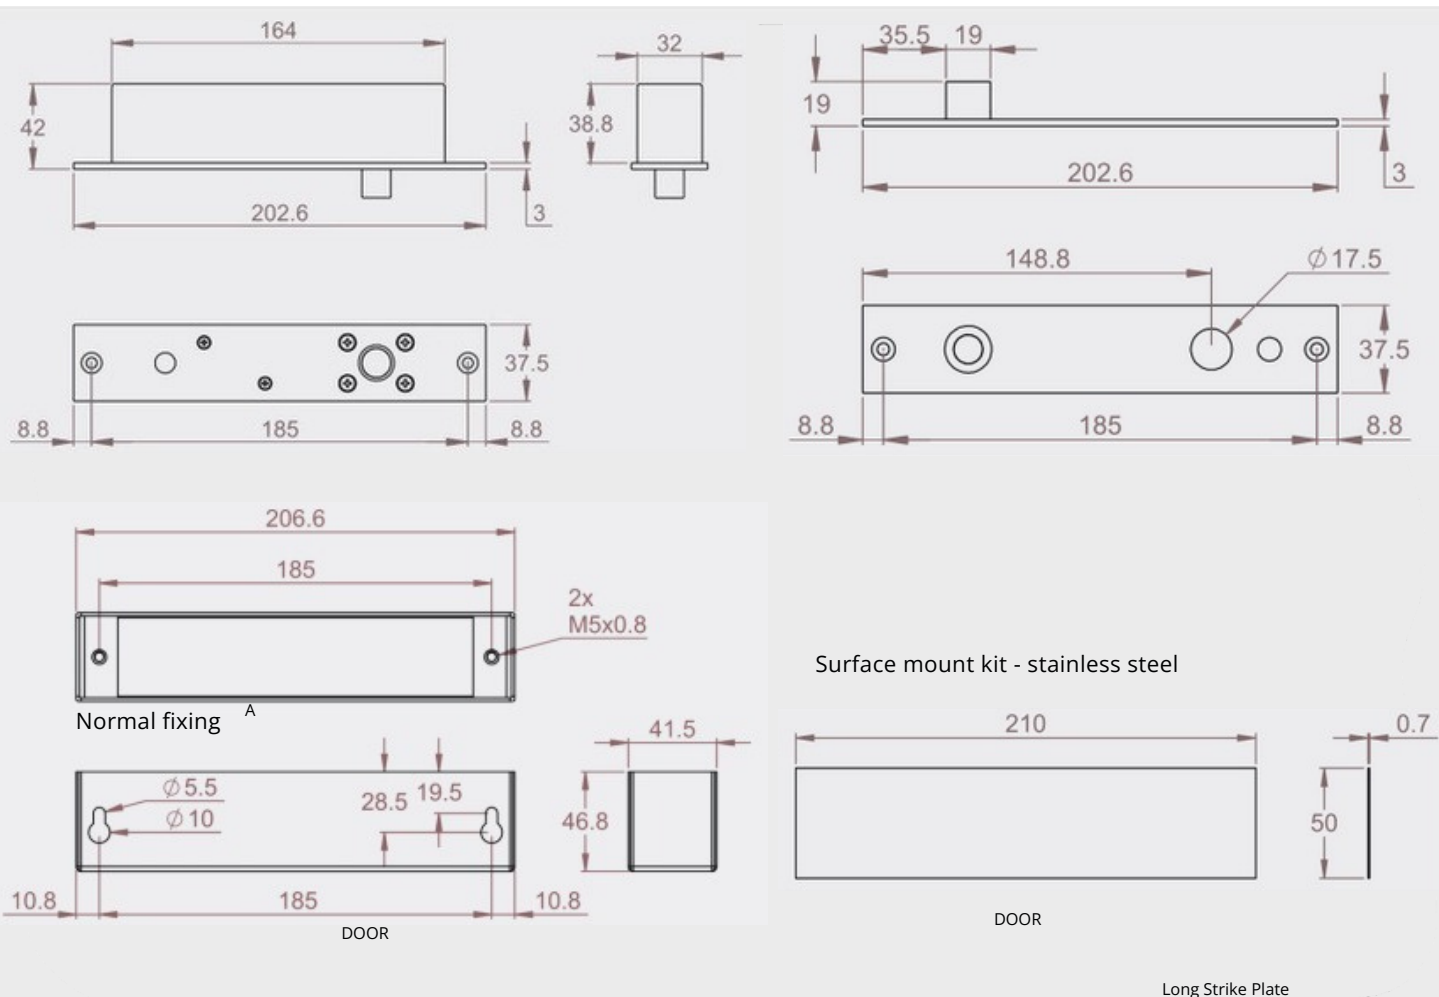

All dimensions are shown in mm.