# alpro

## Electronic Side Load Lock

## ALP200D-YD30D



Cobalt YD30 is a revolutionary low voltage motor driven electronic lock for 180° swing doors. It has been designed to secure double action doors and addresses the two biggest issues in door locking; the ability to align a misaligned door and the ability to release when requested, even with excessive load on the door. The ALP200D is typically used in commercial doors and controlled by access control systems. • Suitable for wood, aluminium and glass

The Alpro ALP200D also known as the

- Door misalignment of up to +/- 8mm is automatically corrected
- Door gap max. 6mm (1/4 inch)

#### **Side Load Release**

The door can have in excess of 600kg (1,350 lbf) being applied and it will still release instantly when requested

#### Simple Configuration

Convert from fail safe to fail secure by repositioning a single jumper

#### **High Security**

Automatic deadlocking 10,000N holding force (1,000kg) Two, 10mm thick stainless steel bolt pins 13mm bolt length

Stainless Steel grade 304 lock/strike plate Bolt material Stainless Steel 17-4 PH

#### **Electrical Specification**

Input voltage from 12V DC-24V DC Less than 40mA standby current Reverse polarity and transient protection Multiple attempts to lock

#### **Dual Monitoring**

Door and bolt position monitors

#### **Initial Power Up Time & Current**

11 seconds, 0.75A@12VDC, 0.4A@24VDC

#### **Standby Current**

40mA@12VDC, 25mA@24VDC

#### **Versatile Installation**

Mortice mount horizontally or vertically, on double action doors Surface mount using the ALP200D accessories. including mounting onto glass




Using ALP200D accessories to surface-mount a lock or strike provides greater installation flexibility and enables glass-door security. Dress plates give a clean finish when a housing is fitted to glass, and both housing and plates come with self-adhesive tape for quick application to doors and frames.

### **Ordering Information**


<b>Description</b> Cobalt Electronic Lock and Strike Plate	Code ALP200D
Accessories	
Cobalt Strike Plate – 255mm (L) x 30mm (W) x 3mm (D) Cobalt Housing with tape – 259mm (L) x 34mm (W) x 56mm (D)	ALP203H ALP204J
Cobalt Dress Plate with tape – 260mm (L) x 58mm (W)	ALP206J
Cobalt Fixing Tab for use on Mortise installations only - metal extrusion	ALP 208
5m Wire Loom	ALP209A



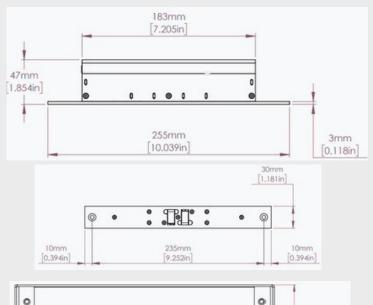




ALP204J Housing (available separately)

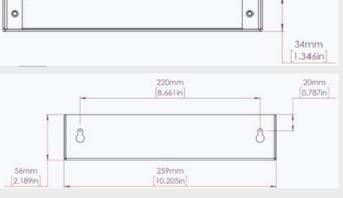

ALP203H **Strike Plate** 

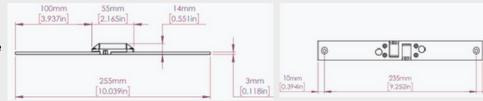

26.0 7.0

All dimensions are shown in mm.