

alpro


ANSI Electric Strike

AL110

1



2

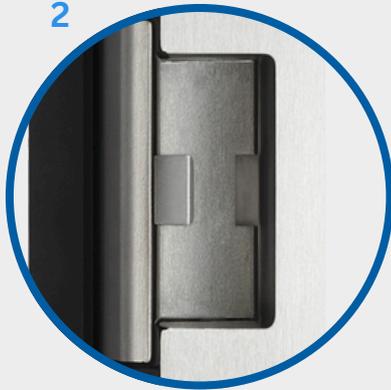

3



The Alpro AL110 series is an ANSI style security strike complete with stainless steel short or long faceplate for use in metal, timber and some composite door applications.

12/24VDC Selectable

Compact Cast Aluminium Body

35mm overall depth

Low Current Consumption

200mA - 12VDC continuous ($\pm 15\%$)

100mA - 24VDC continuous ($\pm 15\%$)

Simple Fail Safe/Fail Secure

Changeover Easy Installation

Stick on/peel off template

Monitored and Lipless Versions Available

Weather Resistant

Options

ANSI short or long faceplates

Extension lips to be purchased separately, available in - 15, 25, 50 and 75mm (pre-drilled strike body)

Compliance

- Electromagnetic Compatibility - Directive 2014/30/EU
- Restriction of the Use of certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) Directive 2011/65/EU

Lock Compatibility

Accepts 13mm latch bolt when fitted with 3mm door gap.

1. Long /Short Faceplate, Standard Strike
2. Long / Short Faceplate, Monitored Strike
3. Long / Short Faceplate, Lipless Strike



6 YEAR GUARANTEE

Ordering Information

Description

- 12/24VDC ANSI Short SS Strike including mounting kit
- 12/24VC ANSI Short SS Strike including mounting kit
- 12/24VDC ANSI Long SS Strike including mounting kit
- 12/24VDC ANSI Long SS Strike including mounting kit
- 12/24VDC ANSI Short SS Strike including mounting kit
- 12/24VC ANSI Short SS Strike including mounting kit
- 12/24VDC ANSI Long SS Strike including mounting kit
- 12/24VDC ANSI Long SS Strike including mounting kit
- 12/24VDC ANSI Short SS Strike including mounting kit
- 12/24VC ANSI Short SS Strike including mounting kit
- 12/24VDC ANSI Long SS Strike including mounting kit
- 12/24VDC ANSI Long SS Strike including mounting kit

Accessories

- 15mm Extension Lip
- 25mm Extension Lip
- 50mm Extension Lip
- 75mm Extension Lip
- Rectifier Sounder Module
- 13mm Rebate Plate
- Radius Brushed Aluminium Faceplate
- Euro Sashlock Faceplate Non-Handed
- UK Sashlock Faceplate Non-Handed

Function

- Fail Safe / PTL
- Fail Secure / PTO
- Fail Safe / PTL
- Fail Secure / PTO
- Fail Safe / PTL - Monitored
- Fail Secure / PTO - Monitored
- Fail Safe / PTL - Monitored
- Fail Secure / PTO - Monitored
- Fail Safe / PTL - Lipless
- Fail Secure / PTO - Lipless
- Fail Safe / PTL - Lipless
- Fail Secure / PTO - Lipless

Code


- AL111AS**
- AL112AS**
- AL111BS**
- AL112BS**
- AL111AS-M**
- AL112AS-M**
- AL111BS-M**
- AL112BS-M**
- AL111AS-0**
- AL112AS-0**
- AL111BS-0**
- AL112BS-0**
- ALEX1115**
- ALEX1125**
- ALEX1150**
- ALEX1175**
- IEC-RM1**
- ALS1113**
- AL110RADIUS**
- AL110SLEU**
- AL110SLUK**

Illustrated AL110 ANSI short metal door preparation

(BS) ANSI long faceplate 200 x 35
 (AS) ANSI short faceplate 124 x 31


15, 25, 50 & 75mm Extension Lips are available as extras

Note: For detail of installation see instructions/template

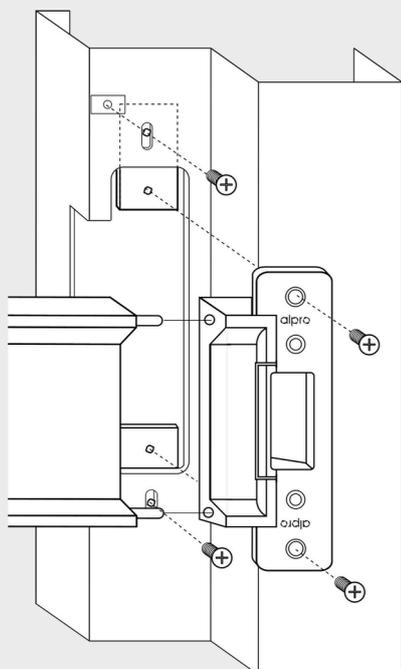

(BS) ANSI Long Faceplate

(AS) ANSI Short Faceplate

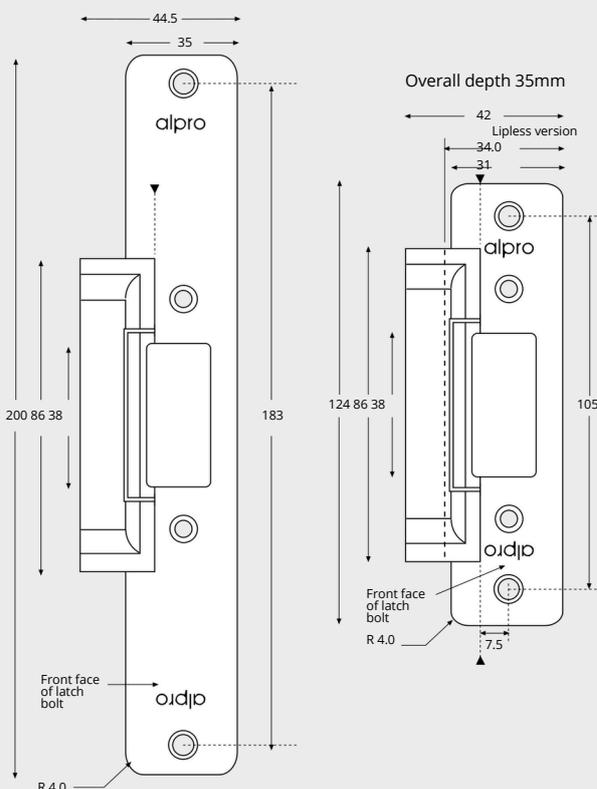

All dimensions are shown in mm.