

alpro

Modular Push Bar Strand Push Bar Range



The modular push bar panic exit device range comprises a full width cross bar and modular components (standard mechanism, idler and cross arm).

The range offers a large degree of flexibility and can provide 1, 2 and 3 point latches (with horizontal or side entry Pullman latches) and 2 or 3 point bolts (with vertical Pullman latches).

Suitable for public buildings (such as hotels, schools, retail outlets, hospitals, nightclubs) where people are unfamiliar with surroundings.

Standard devices suitable for doors up to 2585mm high, 1050mm wide, for larger doors variations available to suit doors up to 3150mm high, 1450mm wide.

Application

Supplied with striker plates for timber doors as standard.

Strikers also available for PVC-U, Aluminium and Steel doors (Please specify when ordering).

Microswitch

The modular cross bar range can be provided with a microswitch contained in either the operating mechanism or idler. If required please specify at the time of ordering stating the microswitch location (Additional cost).

Dogging facility: Dogging should not be used on the fire/ smoke door assemblies

The modular range is available with a dogging or hold-back facility (Additional cost).

Can only be used on escape doors. If required specify when ordering.

Outside access

Optional outside access devices are available to provide entry from the outside (Refer to Outside Access data sheet).

Compliance

EN1125 : 2008 (classification 3-7-7-B-1-4-2-2-A-A)



All Panic Hardware devices (with full width crossarm) have been tested and certified to EN1125 : 2008 (classification 3-7-7-B-1-4-2-2-A-A)



1 YEAR GUARANTEE

Ordering Information

Finishes

Powdercoated finishes


- Silver EPS (20)
- Black EPB (01)
- White EPW (25)
- Silver with Green crossarm SGN (82)
- Black with Green crossarm BGN (81)
- White with Green crossarm WGN (85)
- Black with SAA crossarm BSR (80)
- Other colours (00)

Plated finishes

- Satin Stainless Steel Plated SSSP (44)
- Satin Stainless Steel Plated with Green cross arm SSGN (84)
- Polished Stainless Steel Plated PSSP (55)
- Polished Brass Plated BP (43)

*Available to special order. Please contact us to enquire.

Technical Drawings

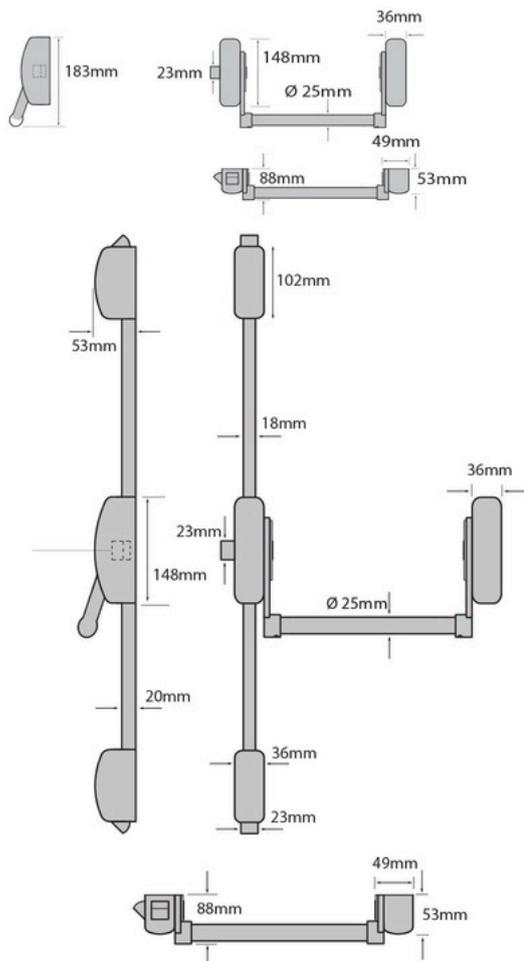


Technical drawings applicable to 83PH3500320, 83PH3550320, 83PH3570320

All dimensions are shown in mm.

Code

83PH3500320 Reversible single point panic latch

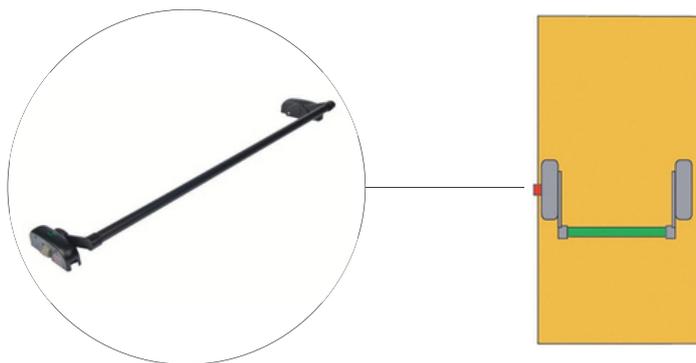

83PH3550320 Reversible 2/3-point panic bolt



83PH3570320 Reversible three point panic latch



Strikers



Standard striker supplied with all devices



Floor striker (supplied with 83PH3550320)



Striker for recessed frames (supplied separately)